


3DWS/4DWS Simplex SDS31318

Control Panel Schematic and Layout

CONTROL PANEL SCHEMATIC


FILENAME: SDS31318

REVDATE: 0523

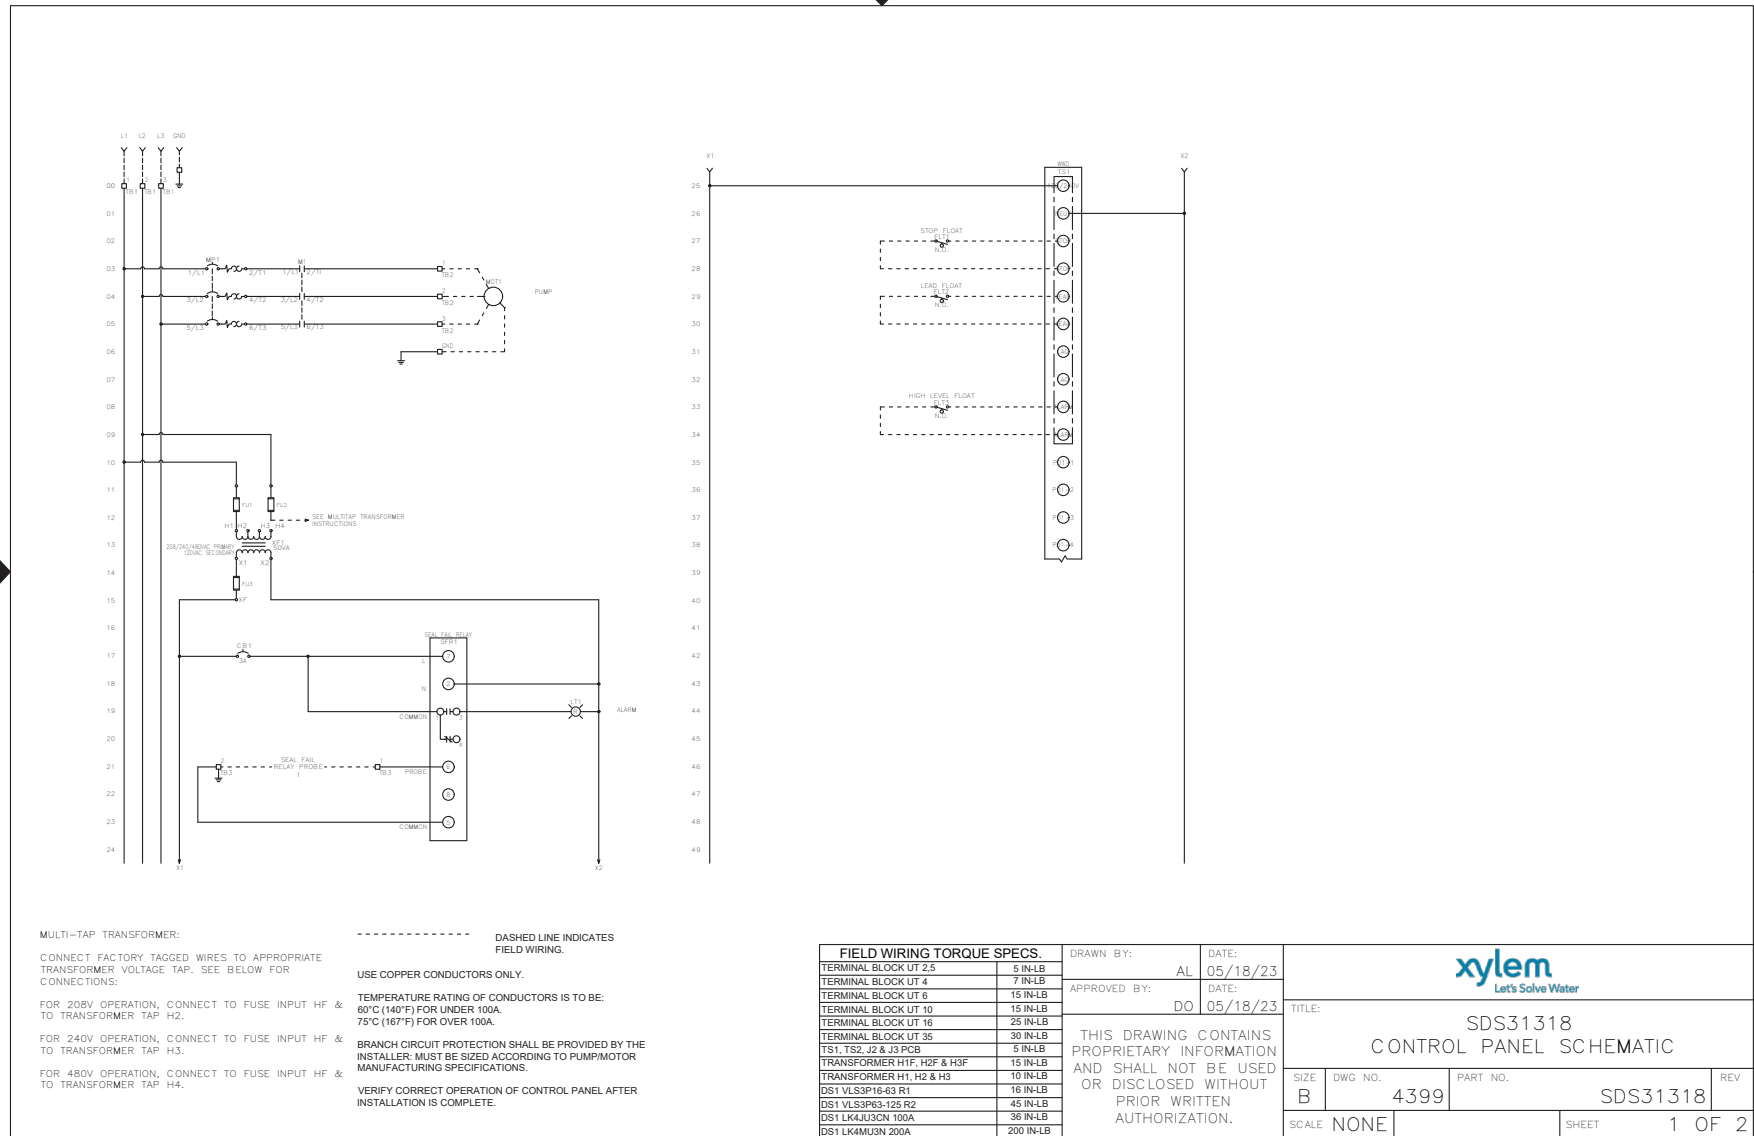

FNAME: SDS31318

REVDATE: 0523

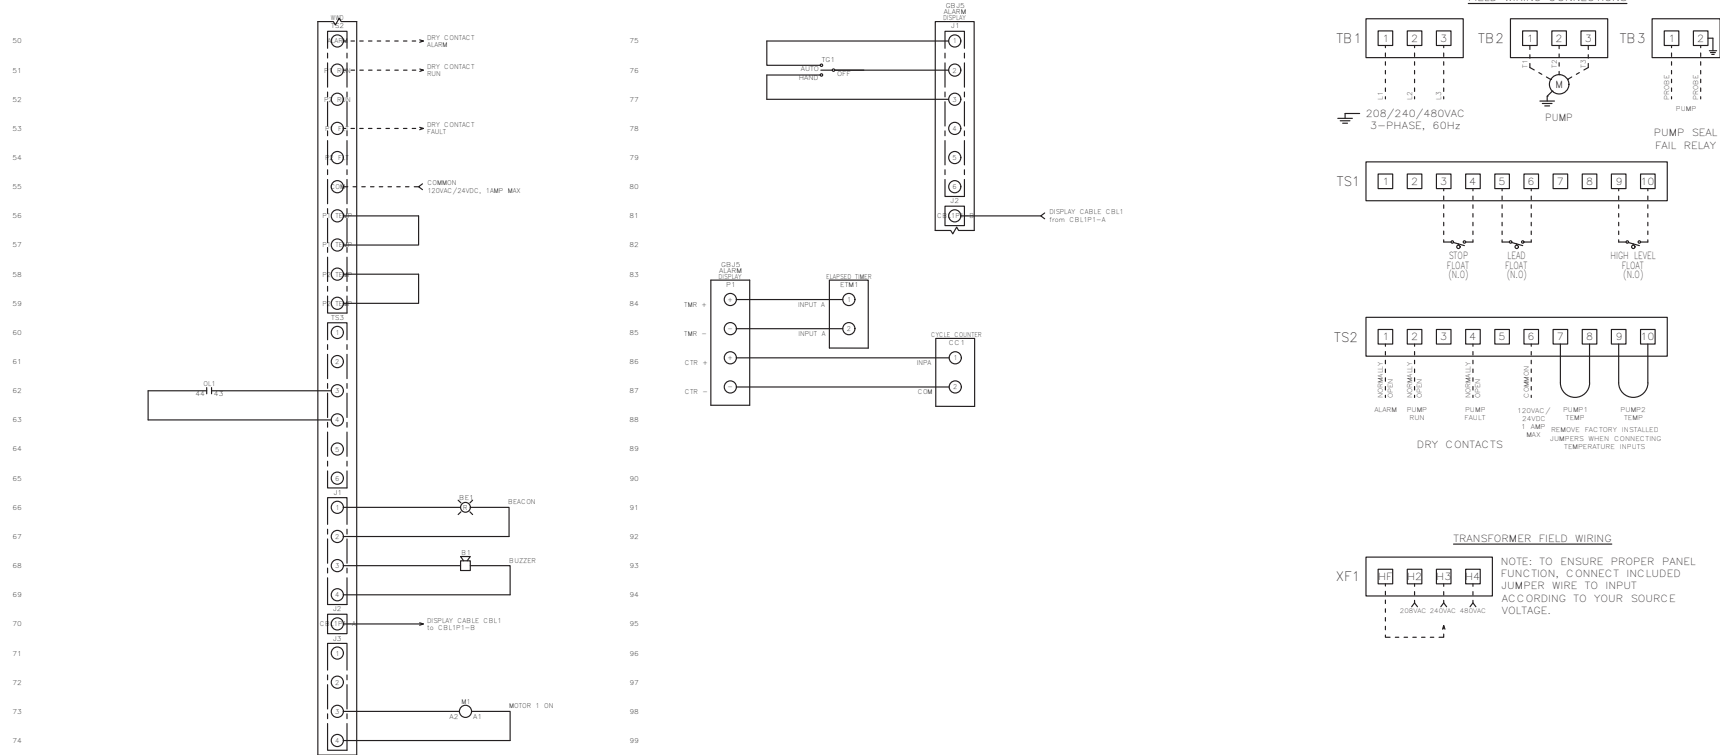



MULTI-TAP TRANSFORMER:
CONNECT FACTORY TAGGED WIRES TO APPROPRIATE TRANSFORMER VOLTAGE TAP. SEE BELOW FOR CONNECTIONS:
FOR 208V OPERATION, CONNECT TO FUSE INPUT HF & TO TRANSFORMER TAP H2.
FOR 240V OPERATION, CONNECT TO FUSE INPUT HF & TO TRANSFORMER TAP H3.
FOR 480V OPERATION, CONNECT TO FUSE INPUT HF & TO TRANSFORMER TAP H4.

----- DASHED LINE INDICATES FIELD WIRING.
USE COPPER CONDUCTORS ONLY.
TEMPERATURE RATING OF CONDUCTORS IS TO BE: 60°C (140°F) FOR UNDER 100A, 75°C (167°F) FOR OVER 100A.
BRANCH CIRCUIT PROTECTION SHALL BE PROVIDED BY THE INSTALLER; MUST BE SIZED ACCORDING TO PUMP/MOTOR MANUFACTURING SPECIFICATIONS.
VERIFY CORRECT OPERATION OF CONTROL PANEL AFTER INSTALLATION IS COMPLETE.

FIELD WIRING TORQUE SPECS.		DRAWN BY:		DATE:				
TERMINAL BLOCK UT 2.5	5 IN-LB	AL	05/18/23					
TERMINAL BLOCK UT 4	7 IN-LB	APPROVED BY: DO	05/18/23	TITLE: SDS31318 CONTROL PANEL SCHEMATIC				
TERMINAL BLOCK UT 6	15 IN-LB							
TERMINAL BLOCK UT 10	15 IN-LB							
TERMINAL BLOCK UT 16	25 IN-LB							
TERMINAL BLOCK UT 35	30 IN-LB	THIS DRAWING CONTAINS PROPRIETARY INFORMATION AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN AUTHORIZATION.						
TS1, TS2, J2 & J3 PCB	5 IN-LB							
TRANSFORMER H1F, H2F & H3F	15 IN-LB							
TRANSFORMER H1, H2 & H3	10 IN-LB							
DS1 VLS3P63-125 R1	16 IN-LB							
DS1 VLS3P63-125 R2	45 IN-LB							
DS1 LK4JU3CN 100A	36 IN-LB							
DS1 LK4MU3N 200A	200 IN-LB	SIZE B		DWG NO. 4399	PART NO. SDS31318	REV		
		SCALE NONE		SHEET 2 OF 2				

FN: SDS31318

REV: 0523

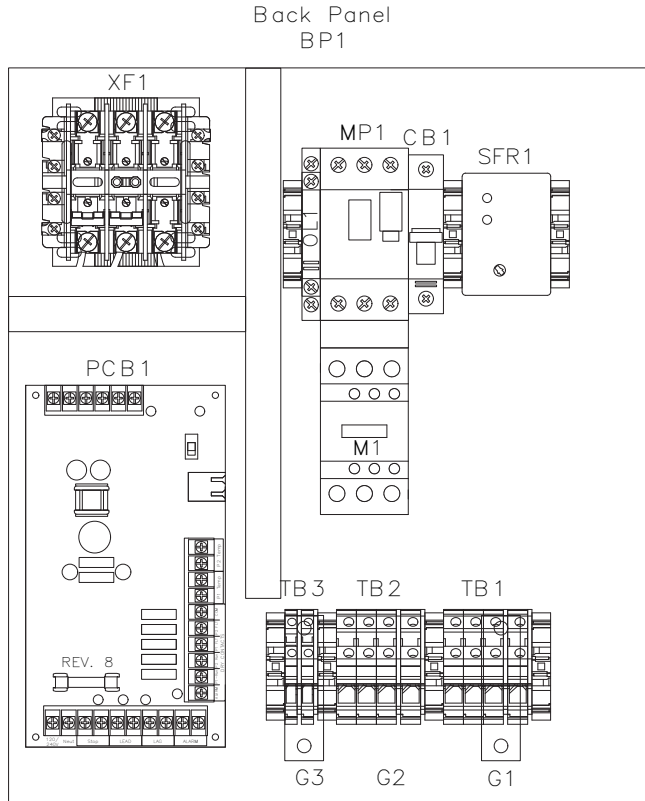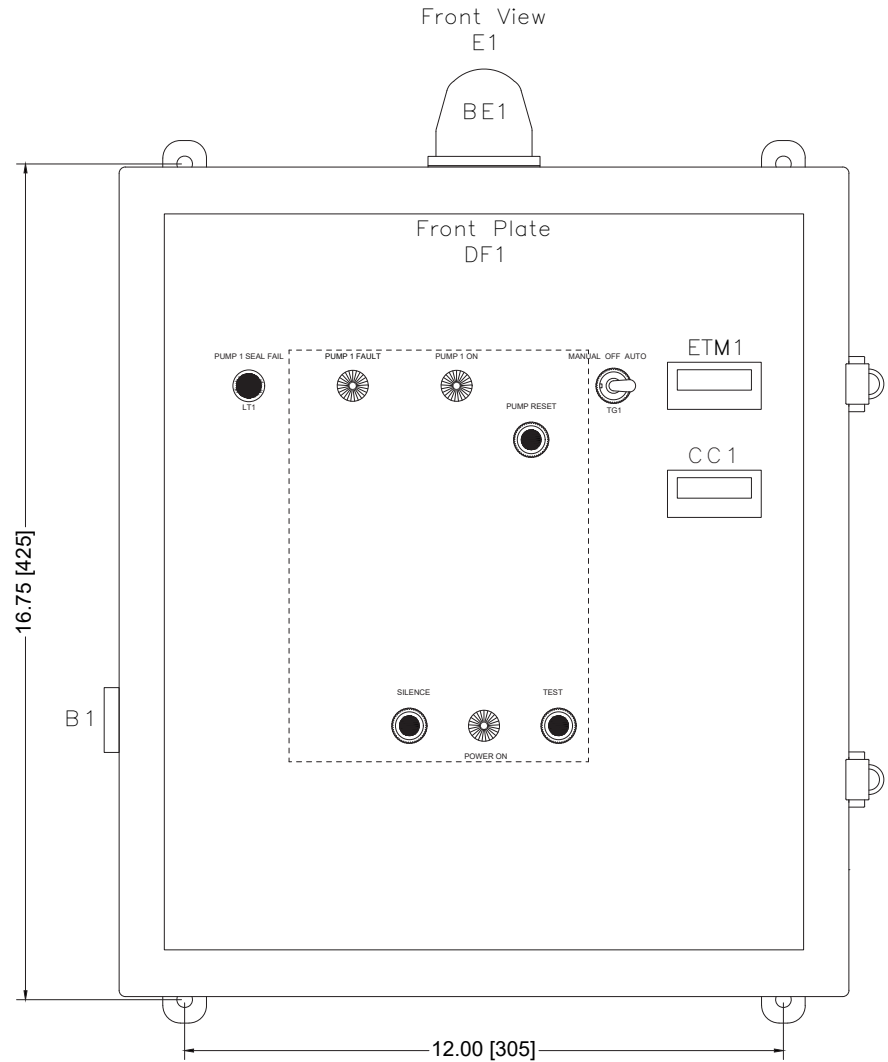

DRAWN BY:	AL	DATE:	05/18/23			
APPROVED BY:	DO	DATE:	05/18/23			
THIS DRAWING CONTAINS PROPRIETARY INFORMATION AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN AUTHORIZATION.				TITLE:		
				SDS31318 CONTROL PANEL LAYOUT		
				SIZE B	DWG NO. 4400	PART NO. SDS31318
SCALE NONE				SHEET 1 OF 2		

CONTROL PANEL LAYOUT



FNAME: SDS31318

REVDATE: 0523

QTY	MANUFACTURER	DESCRIPTION	PART NUMBER	REF.
1	Integra	P.C. Nema 4X Enclosure	H161407HCLL	E1
1	All-Spec	Dead Front	519P	DF1
1	All-Spec	Back Panel	525	BP1
1	Integra	Hinge Kit	USOPK-909	N/A
1	Ingram	Beacon	R10-SM	BE1
1	Ingram	Buzzer	PB-024-AD	B1
1	VCC	Red Light 125V	1050QC1	LT1
1	See Water	Display Board	GBJ5	N/A
3	LEDTRONICS	White Lense	LENS-LCD780-CW F	N/A
2	See Water	Flat Cable Assembly	IDC-25MB	N/A
2	Molex	4 Pin Connector	09-50-3041	N/A
1	Molex	6 Pin Connector	09-50-3061	N/A
1	See Water	Power Circuit Board	WWD	PCB1
1	Carling	HOA Toggle Switch	6FC57-73	N/A
1	Schneider	Fused Transformer 50VA	9070TF50D20	XF1
2	Mersen	KLDR 3/10A Fuse	KLDR-3/10A	XF1
1	Mersen	FLM 6/10A Fuse	FLM-6/10A	XF1

QTY	MANUFACTURER	DESCRIPTION	PART NUMBER	REF.
1	Schneider	Motor Protector	GV2ME20	MP1
1	Schneider	Side Mount Auxiliary	GVAN11	OL1
1	Schneider	Contactor	LC1D18JL	M1
1	Schneider	Combination Block	GV2AF3	N/A
1	Noark	Circuit Breaker 3A 1 Pole	B1E1C3	CB1
1	Macromatics	Seal Fail Single Channel Relay	SFP120A100	SFR1
1	Macromatics	8 Pin Socket	70169-D	SFR1
1	Trumeter	Elapsed Time Meter	6320-2500-0000	ETM1
1	Trumeter	Cycle Counter	6300-2500-0000	CC1
1	Phoenix Contact	Terminal Block UT-4	3044102	TB3
1	Phoenix Contact	Terminal Block UT-4-PE	3044128	G3
6	Phoenix Contact	Terminal Block UT-10	3044160	TB1-2
2	Phoenix Contact	Terminal Block UT-10-PE	3044173	G1-2
7	Phoenix Contact	End Stop	3022218	N/A
6	Phoenix Contact	End Cover	3047028	N/A
2	Altech	Angled Mounting Bracket	CA603	N/A
3	See Water	N.O. Narrow Angle Floats 50'	FPC0N50	N/A
1	UL	508A UL Labels	N/A	N/A



DRAWN BY:	AL	DATE:	05/18/23		
APPROVED BY:	DO	DATE:	05/18/23		
THIS DRAWING CONTAINS PROPRIETARY INFORMATION AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN AUTHORIZATION.				TITLE:	
				SDS31318	
				CONTROL PANEL LAYOUT	
				SIZE	DWG NO.
B	4400	SDS31318			
SCALE		NONE	SHEET		2 OF 2



Xylem Inc.
2881 East Bayard Street Ext.
Seneca Falls, NY 13148
Phone: (800) 453-6777
Fax: (888) 322-5877
www.xylem.com/bellgossett