


JOB:	REPRESENTATIVE:	
UNIT TAG:	ORDER NO.	DATE:
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:



Model VSC 6x8x13 1/2 A Double Suction Split Case Pump

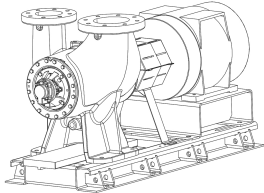

SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

STANDARD MATERIALS OF CONSTRUCTION


- Cast Iron Bronze Fitted
- Heavy Duty Maintenance Free Bearings
- Alignment Friendly Coupling
- Heavy Duty Groutless Baseplate
- ANSI/OSHA Coupling Guard
- ISO 1940-1:2003 Impeller Balance


OPTIONAL MATERIALS OF CONSTRUCTION

- Galvanized Drip Pan
- Spacer Coupling

TYPE OF SEAL AND WORKING PRESSURE

- Standard:** 175 PSIG (12 BAR) max. working pressure, flat face flanges, 125# ANSI flange drilling, Unitized mechanical seal, EPR/Carbon/Silicon Carbide, 175 PSIG (12 BAR) max. suction pressure, 0 to 300°F (-18 to 149°C)
- Optional:** 300 PSIG (20 BAR) max. working pressure, flat face flanges, 250# ANSI flange drilling, Unitized mechanical seal, EPR/Carbon/Silicon Carbide, 200 PSIG (13.7 BAR) max. suction pressure, 0 to 300°F (-18 to 149°C)
- Optional:** 300 PSIG (20 BAR) max. working pressure, flat face flanges, 250# ANSI flange drilling, balanced mechanical seal, EPR/Graphite loaded Silicon Carbide on Graphite loaded Silicon Carbide, 300 PSIG (20 BAR) max. suction pressure, 0 to 300°F (-18 to 149°C)

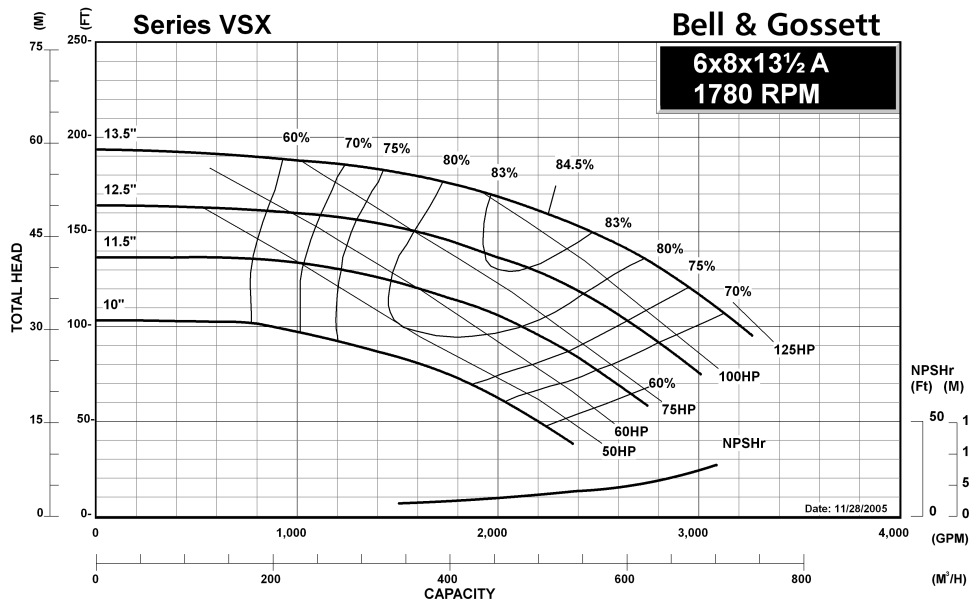

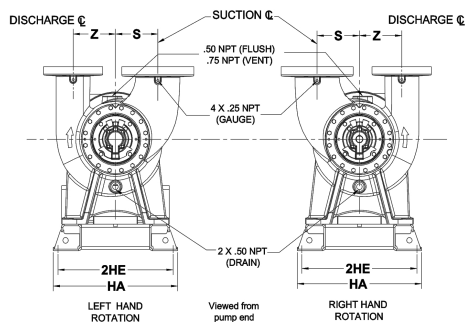


FLANGE DIMENSIONS IN INCHES (MM)			
	SIZE	THICKNESS	O.D.
Discharge	6"	1.69 (43)	12.13 (308)
Suction	8"	1.88 (48)	14.75 (375)

FLANGES ARE 125# ANSI - STANDARD
250# ANSI - AVAILABLE

DIMENSIONS IN INCHES (MM)		
S	X	Z
9.21 (234)	17 (432)	9.21 (234)

Removal clearance from end
of bracket: 24 Inches (610 mm)

STANDARD COUPLER

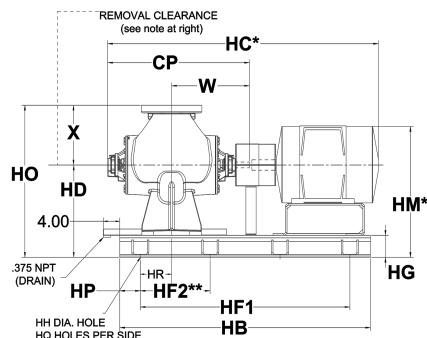

*Motor dimensions are approximate and vary by manufacturer and motor type.
**Distance to the next available hole.

MOTOR FRAME	DIMENSIONS - INCHES (mm) FOR STANDARD COUPLER															
	CP	HA	HB	HC*	HD	2HE	HF ₁	HF ₂ **	HG	HH	HM*	HO	HP	HQ	HR	W
256T	34.48 (876)	25.4 (645)	61 (1549)	60.25 (1530)	23.25 (591)	23.52 (597)	51 (1295)	17 (432)	5.25 (133)	0.88 (22)	31.07 (789)	40.25 (1022)	5 (127)	4	7.63 (194)	18.93 (481)
284T/TS	34.48 (876)	25.4 (645)	61 (1549)	61.41 (1560)	23.25 (591)	23.52 (597)	51 (1295)	17 (432)	5.25 (133)	0.88 (22)	31.07 (789)	40.25 (1022)	5 (127)	4	7.63 (194)	18.93 (481)
286T/TS	34.48 (876)	25.4 (645)	61 (1549)	62.90 (1598)	23.25 (591)	23.52 (597)	51 (1295)	17 (432)	5.25 (133)	0.88 (22)	31.07 (789)	40.25 (1022)	5 (127)	4	7.63 (194)	18.93 (481)
324T/TS	34.48 (876)	25.4 (645)	61 (1549)	65.73 (1669)	23.25 (591)	23.52 (597)	51 (1295)	17 (432)	5.25 (133)	0.88 (22)	31.82 (808)	40.25 (1022)	5 (127)	4	7.63 (194)	18.93 (481)
326T/TS	34.48 (876)	25.4 (645)	61 (1549)	66.85 (1698)	23.25 (591)	23.52 (597)	51 (1295)	17 (432)	5.25 (133)	0.88 (22)	32.35 (822)	40.25 (1022)	5 (127)	4	7.63 (194)	18.93 (481)
364T/TS	34.48 (876)	25.4 (645)	61 (1549)	68.68 (1745)	23.25 (591)	23.52 (597)	51 (1295)	17 (432)	5.25 (133)	0.88 (22)	33.2 (843)	40.25 (1022)	5 (127)	4	7.63 (194)	18.93 (481)
365T/TS	34.48 (876)	25.4 (645)	61 (1549)	68.68 (1745)	23.25 (591)	23.52 (597)	51 (1295)	17 (432)	5.25 (133)	0.88 (22)	33.2 (843)	40.25 (1022)	5 (127)	4	7.63 (194)	18.93 (481)
404T/TS	34.48 (876)	25.4 (645)	70 (1778)	71.79 (1823)	23.25 (591)	23.52 (597)	60 (1524)	15 (381)	5.25 (133)	0.88 (22)	33.72 (856)	40.25 (1022)	5 (127)	5	7.62 (194)	18.93 (481)
405T/TS	34.48 (876)	25.4 (645)	70 (1778)	73.79 (1874)	23.25 (591)	23.52 (597)	60 (1524)	15 (381)	5.25 (133)	0.88 (22)	33.72 (856)	40.25 (1022)	5 (127)	5	7.62 (194)	18.93 (481)
444T/TS	34.48 (876)	25.4 (645)	70 (1778)	79.25 (2013)	23.25 (591)	23.52 (597)	60 (1524)	15 (381)	5.25 (133)	0.88 (22)	38.77 (985)	40.25 (1022)	5 (127)	5	7.62 (194)	18.93 (481)
445T/TS	34.48 (876)	25.4 (645)	70 (1778)	80.86 (2054)	23.25 (591)	23.52 (597)	60 (1524)	15 (381)	5.25 (133)	0.88 (22)	38.77 (985)	40.25 (1022)	5 (127)	5	7.62 (194)	18.93 (481)


Dimensions are subject to change. Not to be used for construction purposes unless certified.

Units may be built where foot/feet overhang the motor mounting platform. If overhang is unacceptable, consult factory for a custom submittal, quotation and/or lead time. A certified motor drawing will be required.

Xylem Inc.
8200 N. Austin Avenue
Morton Grove, IL 60053
Phone: (847)966-3700
Fax: (847)965-8379
www.bellgossett.com



JOB:	REPRESENTATIVE:	
UNIT TAG:	ORDER NO.	DATE:
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:



Model VSC

6x8x13 1/2 A

Double Suction Split Case Pump



SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

STANDARD MATERIALS OF CONSTRUCTION


- Cast Iron Bronze Fitted
- Heavy Duty Maintenance Free Bearings
- Alignment Friendly Coupling
- Heavy Duty Groutless Baseplate
- ANSI/OSHA Coupling Guard
- ISO 1940-1:2003 Impeller Balance

OPTIONAL MATERIALS OF CONSTRUCTION


- Galvanized Drip Pan
- Spacer Coupling

TYPE OF SEAL AND WORKING PRESSURE

- Standard:** 175 PSIG (12 BAR) max. working pressure, flat face flanges, 125# ANSI flange drilling, Unitized mechanical seal, EPR/Carbon/Silicon Carbide, 175 PSIG (12 BAR) max. suction pressure, 0 to 300°F (-18 to 149°C)
- Optional:** 300 PSIG (20 BAR) max. working pressure, flat face flanges, 250# ANSI flange drilling, Unitized mechanical seal, EPR/Carbon/Silicon Carbide, 200 PSIG (13.7 BAR) max. suction pressure, 0 to 300°F (-18 to 149°C)
- Optional:** 300 PSIG (20 BAR) max. working pressure, flat face flanges, 250# ANSI flange drilling, balanced mechanical seal, EPR/Graphite loaded Silicon Carbide on Graphite loaded Silicon Carbide, 300 PSIG (20 BAR) max. suction pressure, 0 to 300°F (-18 to 149°C)

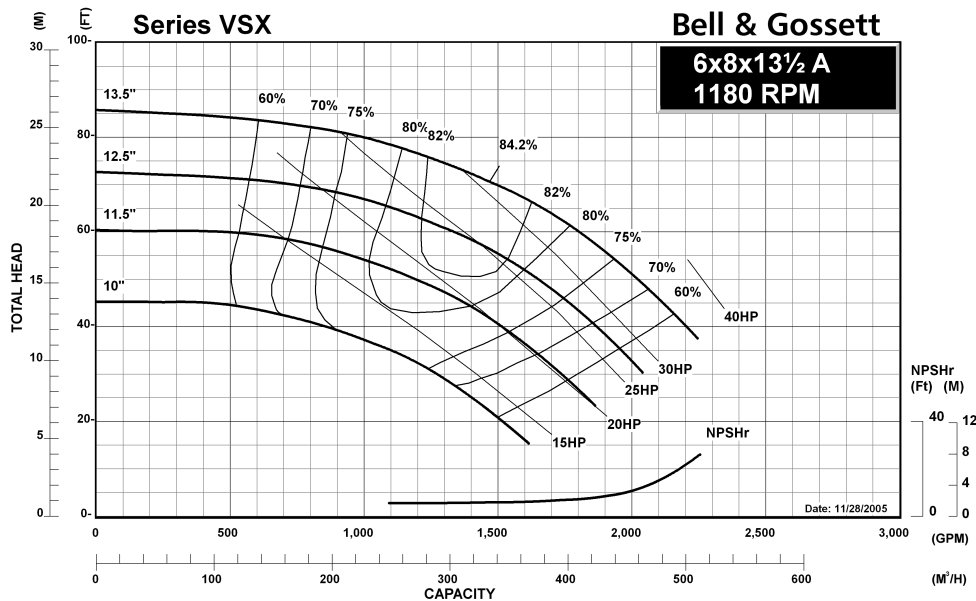

JOB:	REPRESENTATIVE:	
UNIT TAG:	ORDER NO.	DATE:
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:



Model VSC 6x8x13 1/2 A Double Suction Split Case Pump



SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

STANDARD MATERIALS OF CONSTRUCTION


- Cast Iron Bronze Fitted
- Heavy Duty Maintenance Free Bearings
- Alignment Friendly Coupling
- Heavy Duty Groutless Baseplate
- ANSI/OSHA Coupling Guard
- ISO 1940-1:2003 Impeller Balance


OPTIONAL MATERIALS OF CONSTRUCTION

- Galvanized Drip Pan
- Spacer Coupling

TYPE OF SEAL AND WORKING PRESSURE

- Standard:** 175 PSIG (12 BAR) max. working pressure, flat face flanges, 125# ANSI flange drilling, Unitized mechanical seal, EPR/Carbon/Silicon Carbide, 175 PSIG (12 BAR) max. suction pressure, 0 to 300°F (-18 to 149°C)
- Optional:** 300 PSIG (20 BAR) max. working pressure, flat face flanges, 250# ANSI flange drilling, Unitized mechanical seal, EPR/Carbon/Silicon Carbide, 200 PSIG (13.7 BAR) max. suction pressure, 0 to 300°F (-18 to 149°C)
- Optional:** 300 PSIG (20 BAR) max. working pressure, flat face flanges, 250# ANSI flange drilling, balanced mechanical seal, EPR/Graphite loaded Silicon Carbide on Graphite loaded Silicon Carbide, 300 PSIG (20 BAR) max. suction pressure, 0 to 300°F (-18 to 149°C)

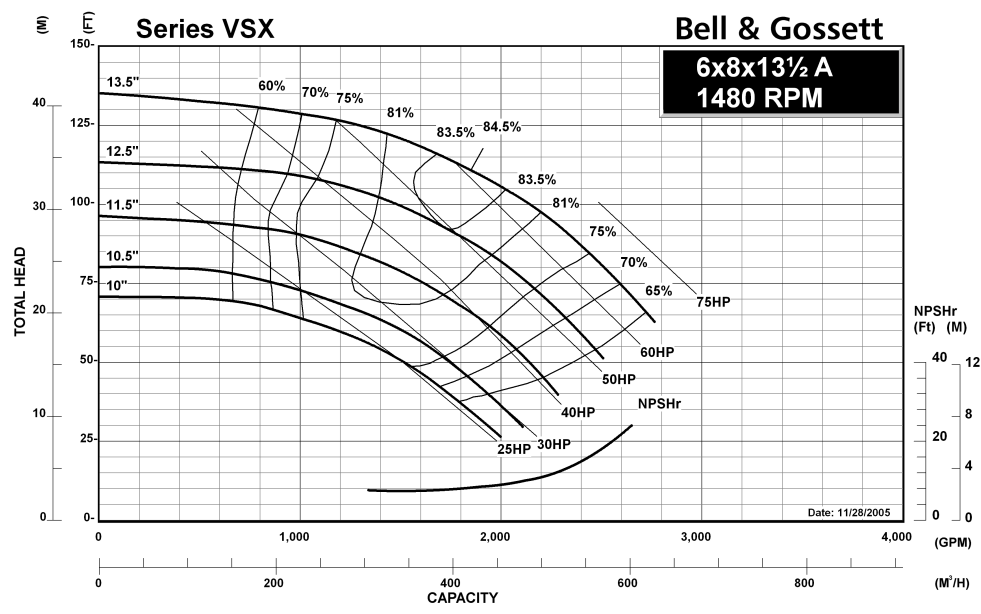

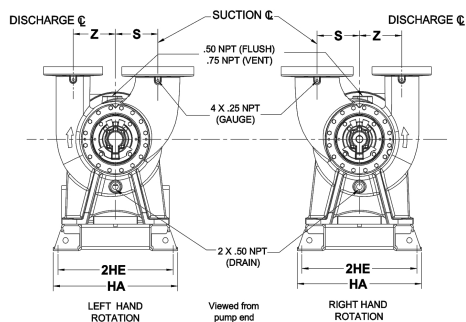


FLANGE DIMENSIONS IN INCHES (MM)			
	SIZE	THICKNESS	O.D.
Discharge	6"	1.69 (43)	12.13 (308)
Suction	8"	1.88 (48)	14.75 (375)

FLANGES ARE 125# ANSI - STANDARD
250# ANSI - AVAILABLE

DIMENSIONS IN INCHES (MM)		
S	X	Z
9.21 (234)	17 (432)	9.21 (234)

Removal clearance from end of bracket: 24 Inches (610 mm)

SPACER COUPLER

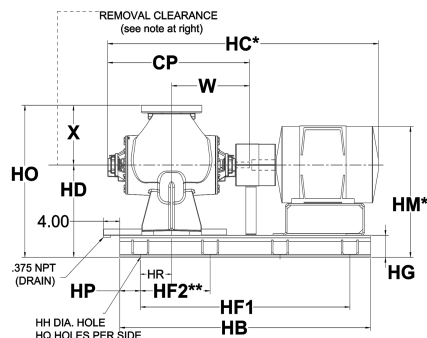

*Motor dimensions are approximate and vary by manufacturer and motor type.

**Distance to the next available hole.

MOTOR FRAME	DIMENSIONS - INCHES (mm) FOR SPACER COUPLER															
	CP	HA	HB	HC*	HD	2HE	HF ₁	HF ₂ **	HG	HH	HM*	HO	HP	HQ	HR	W
256T	34.48 (876)	25.4 (645)	70 (1778)	69.50 (1765)	23.25 (591)	23.52 (597)	60 (1524)	15 (381)	5.25 (133)	0.88 (22)	31.07 (789)	40.25 (1022)	5 (127)	5	7.62 (194)	18.93 (481)
284T/TS	34.48 (876)	25.4 (645)	70 (1778)	70.66 (1795)	23.25 (591)	23.52 (597)	60 (1524)	15 (381)	5.25 (133)	0.88 (22)	31.07 (789)	40.25 (1022)	5 (127)	5	7.62 (194)	18.93 (481)
286T/TS	34.48 (876)	25.4 (645)	70 (1778)	72.15 (1833)	23.25 (591)	23.52 (597)	60 (1524)	15 (381)	5.25 (133)	0.88 (22)	31.07 (789)	40.25 (1022)	5 (127)	5	7.62 (194)	18.93 (481)
324T/TS	34.48 (876)	25.4 (645)	70 (1778)	74.98 (1904)	23.25 (591)	23.52 (597)	60 (1524)	15 (381)	5.25 (133)	0.88 (22)	31.82 (808)	40.25 (1022)	5 (127)	5	7.62 (194)	18.93 (481)
326T/TS	34.48 (876)	25.4 (645)	70 (1778)	76.10 (1933)	23.25 (591)	23.52 (597)	60 (1524)	15 (381)	5.25 (133)	0.88 (22)	32.35 (822)	40.25 (1022)	5 (127)	5	7.62 (194)	18.93 (481)
364T/TS	34.48 (876)	25.4 (645)	80 (2032)	77.93 (1980)	23.25 (591)	23.52 (597)	72 (1829)	18 (457)	5.25 (133)	0.88 (22)	33.2 (843)	40.25 (1022)	4 (102)	5	8.63 (219)	18.93 (481)
365T/TS	34.48 (876)	25.4 (645)	80 (2032)	77.93 (1980)	23.25 (591)	23.52 (597)	72 (1829)	18 (457)	5.25 (133)	0.88 (22)	33.2 (843)	40.25 (1022)	4 (102)	5	8.63 (219)	18.93 (481)
404T/TS	34.48 (876)	25.4 (645)	80 (2032)	80.54 (2046)	23.25 (591)	23.52 (597)	72 (1829)	18 (457)	5.25 (133)	0.88 (22)	33.72 (856)	40.25 (1022)	4 (102)	5	8.63 (219)	18.93 (481)
405T/TS	34.48 (876)	25.4 (645)	80 (2032)	82.54 (2096)	23.25 (591)	23.52 (597)	72 (1829)	18 (457)	5.25 (133)	0.88 (22)	33.72 (856)	40.25 (1022)	4 (102)	5	8.63 (219)	18.93 (481)
444T/TS	34.48 (876)	25.4 (645)	80 (2032)	88.00 (2235)	23.25 (591)	23.52 (597)	72 (1829)	18 (457)	5.25 (133)	0.88 (22)	38.77 (985)	40.25 (1022)	4 (102)	5	8.63 (219)	18.93 (481)
445T/TS	34.48 (876)	25.4 (645)	80 (2032)	89.61 (2276)	23.25 (591)	23.52 (597)	72 (1829)	18 (457)	5.25 (133)	0.88 (22)	38.77 (985)	40.25 (1022)	4 (102)	5	8.63 (219)	18.92 (481)

Dimensions are subject to change. Not to be used for construction purposes unless certified.

Units may be built where foot/feet overhang the motor mounting platform. If overhang is unacceptable, consult factory for a custom submittal, quotation and/or lead time. A certified motor drawing will be required.

These dimensions are valid when using the Woods Duraflex spacer coupling option. For dimensions on Falk SteelFlex coupling options, consult factory for a special submittal drawing.

