



4DWC

SUBMERSIBLE 4" NON-CLOG SEWAGE PUMP



Bell & Gossett

a xylem brand

Wastewater

FEATURES

Impeller: Cast iron, two vane closed design for high efficiency and maximum wear life. Balanced for smooth operation.

Bronze Wear Ring: Replaceable to renew the running clearances and efficiencies to original conditions.

Casing: Heavy duty cast iron, volute type for maximum efficiency. 4" 125# ANSI cast iron flanged. Adaptable to guide rail mounting system.

Tandem Seals: Two independently mounted mechanical face type seals are separated by an oil filled chamber. The oil chamber acts as a barrier to trap moisture and provide time for a planned shutdown and maintenance. The oil provides lubrication to the internal (upper) seal. Carbon rotating and ceramic stationary faces are standard on both internal (upper) and external (lower) seals. Optional materials are available for the lower seals. See the Nomenclature Page for order number changes to order either silicon carbide/silicon carbide faces with Viton or silicon carbide/tungsten carbide faces with Viton elastomers. These are recommended for applications containing fine solids or abrasives as found in parking lot/garage drainage and construction dewatering jobs.

Moisture Protection System: Two-wire, dual moisture sens-

ing probes are located in the oil filled chamber between the inner and outer seals. When connected to a control panel with an optional Moisture Detection System and an alarm it will detect the presence of moisture should the outer seal fail. It will also detect moisture in the motor chamber and provide a warning prior to water levels reaching the bearing or stator.

Designed for Continuous Operation: Motor is rated continuous duty submerged condition in water that is 40° C or below. Maximum runtime with pump unsubmerged for 7½-40 HP is 15 minutes. Motor is suitable for 10 starts per hour.

Bearings: Ball, single-row, angular contact, Conrad type bearings with a Class 3 internal fit conforming to AFBMA Standard 20 are used. The bearings are greased for life with a premium moisture resistant polyurea thickened grease containing rust inhibitors and suitable for operation over a range of - 25° C to + 120° C.

Impeller Mounting Screw: 300 series stainless steel with anti-rotational locking patch.

Castings: All iron castings are ASTM A48 class 30 gray cast iron.

APPLICATIONS

Heavy duty design features for a wide range of commercial and industrial applications such as:

- Sewage systems
- Flood and pollution control
- Industrial dewatering
- Wastewater treatment plants
- Municipal and subdivision lift stations

SPECIFICATIONS

Pump:

- Solids handling capabilities: 3" maximum.
- Discharge size: 4" 125# ANSI flanged.
- Capacities: up to 1160 GPM.
- Total heads: up to 140 feet.
- Minimum flow: 100 GPM.
- Maximum flow: end of published curve.
- Mechanical seals: 304 stainless steel metal parts, BUNA-N elastomers with carbon/rotary and ceramic/stationary faces standard for upper and lower seals. Optional lower seals are available with Viton elastomers and either silicon carbide/silicon carbide or silicon carbide/tungsten carbide faces.
- Fasteners: 300 series stainless steel

Motor:

- CSA certified motors (Canadian Standards Association).
- Three phase motors only.

- Available voltages: 200, 230, 400, 460 and 575 volt, 60 Hz.
- HP Range: 7.5 - 40
- Motor shaft is a one-piece design of high strength 416 stainless steel.
- All motors are air-filled and designed for continuous duty when fully submerged or for up to 15 minutes operation in air.
- NEMA design "B" with copper windings.
- Class "F" stator winding designed for inverter duty.
- Moisture System: Two wire dual probe monitoring system constantly monitors seal oil chamber and stator housing for moisture. **Note:** control panel must contain an alarm circuit and alarm device.
- Two (2) normally-closed, automatic reset thermostats connected in series and embedded in adjoining phases.
- Power and sensor cords are 25' standard length, 50' available as an option.
- Motors conform to the latest applicable requirements of NEMA, IEEE, ANSI and NEC standards.

NOTICE: Class 10 quick trip overload protection must be provided in control panel.

AGENCY LISTINGS



Tested to UL 778 and CSA 22.2 108 Standards
By Canadian Standards Association
File #218526

SERIES 4DWC MODEL AND MOTOR INFORMATION (All ratings at 3 phase, 60 Hz.)

Order Number	HP	Phase	Volts	RPM	Impeller Dia. (In.)	Impeller Code	S.F. Amps	Service Factor	Full Load Amps	Locked Rotor Amps	Power Cable Size	Sensor Cable Size	Frame Size	Weight (lbs.)
4DWC4K3A2M1C	7.5	3	230	1750	7.5	M	23.4	1.15	21.0	160.0	8/4	18/5	210TY	455
4DWC4K4A2M1C			460				11.7		10.5	80.0	8/4			
4DWC4K5A2M1C			575				9.4		8.4	64.0	14/4			
4DWC4L2A2K1C	10		200		8.00	K	35.6		31.1	186.2	8/4			
4DWC4L3A2K1C			230				31.0		27.0	162.0	8/4			
4DWC4L4A2K1C			460				15.5		13.5	81.0	8/4			
4DWC4L5A2K1C	15		575		9.00	G	12.3		10.8	64.0	14/4			
4DWC4M2A2G1C			200				54.8		48.2	256.0	6/4			
4DWC4M3A2G1C			230				47.8		42.0	222.0	8/4			
4DWC4M4A2G1C			460				23.9		21.0	111.0	8/4			
4DWC4M5A2G1C	20		575		9.75	E	19.1		16.8	88.7	10/4			
4DWC4N2A2E1C			200				74.8		64.4	342.0	4/4			
4DWC4N3A2E1C			230				65.0		56.0	298.0	6/4			
4DWC4N4A2E1C			460				32.5		28.0	149.0	6/4			
4DWC4N5A2E1C	25		575		10.38	C	26.0		22.4	119.0	10/4			
4DWC4P2A2C1C		200	83.6	72.5			394.0	2/4						
4DWC4P3A2C1C		230	72.8	63.0			342.0	4/4						
4DWC4P4A2C1C	30	460	10.75	B	36.4	31.5	171.0	4/4						
4DWC4P5A2C1C		575			29.1	25.2	137.0	8/4						
4DWC4Q2A2B1C		200			103.2	89.7	472.0	2/4						
4DWC4Q3A2B1C	40	230	11.00	A	89.6	78.0	410.0	2/4						
4DWC4Q4A2B1C		460			44.8	39.0	205.0	2/4						
4DWC4Q5A2B1C		575			35.8	31.2	164.0	8/4						
4DWC4R2A2A1C	7.5	1150	200	10.12	D	132.8	114.4	600.0	1/0/4					
4DWC4R3A2A1C			230			115.4	99.4	522.0	1/4					
4DWC4R4A2A1C			460			57.7	49.7	261.0	6/4					
4DWC4R5A2A1C			575			46.2	39.8	209.0	8/4					
4DWC4K2A3D1C	10		200	11.00	A	30.4	26.5	131.6	8/4					
4DWC4K3A3D1C			230			26.4	23.0	114.4	10/4					
4DWC4K4A3D1C			460			13.2	11.5	57.2	10/4					
4DWC4K5A3D1C	15		575	11.00	A	10.6	9.2	45.8	14/4					
4DWC4L2A3A1C			200			40.0	35.0	186.0	8/4					
4DWC4L3A3A1C			230			34.8	30.4	161.0	8/4					
4DWC4L4A3A1C			460			17.4	15.2	80.7	8/4					
4DWC4L5A3A1C	575		13.9	12.2	64.5	12/4								

NOMENCLATURE DESCRIPTION

1st Character - Discharge Size

4 = 4" 125 # ANSI Flanged Discharge

2nd Character - Design

D = Dual Seal with Seal Fail (moisture) Sensors

3rd Character - Pump Type

W = Wastewater (Sewage)

4th Character - Impeller Design

C = Enclosed Impeller

5th Character - Phase

4 = Three Phase with On-Winding, Pilot Duty, Thermal Sensors

6th Character - Horsepower

K = 7.5 M = 15 P = 25 R = 40

L = 10 N = 20 Q = 30

7th Character - Voltage / Phase

2 = 200 / 3 4 = 460 / 3 6 = 380/400 / 3

3 = 230 / 3 5 = 575 / 3

8th Character - Discharge Style

A = ANSI Vertical Flange for Horizontal Discharge

9th Character - Motor RPM / Hertz

(Not all available on all models, see pump specifications)

2 = 1750/60 3 = 1150/60

10th Character - Impeller Code

A = 11.0" 10 HP 1150 RPM 40 HP 1750 RPM

20 HP 1450 RPM

B = 10.75" 30 HP 1750 RPM

C = 10.38" 25 HP 1750 RPM

D = 10.12" 7.5 HP 1150 RPM 15 HP 1450 RPM

E = 9.75" 20 HP 1750 RPM

G = 9.00" 15 HP 1750 RPM 10 HP 1450 RPM

K = 8.00" 10 HP 1750 RPM 7.5 HP 1450 RPM

M = 7.50" 7.5 HP 1750 RPM

T = SPECIAL TRIM

11th Character - Lower (outer) Mechanical Seal

1 = Standard Seal - the upper seal is carbon/rotary and ceramic/stationary, the lower seal is carbon/rotary with ceramic/stationary with BUNA elastomers and 304 stainless steel metal parts.

2 = Optional Lower Seal - silicon carbide/rotary and silicon carbide/stationary with Viton elastomers and 304 SS metal parts is recommended for applications with fine solids or abrasives.

3 = Optional Lower Seal - silicon carbide/rotary and tungsten carbide/stationary with Viton elastomers and 304 SS metal parts is recommended for applications with fine solids or abrasives.

12th Character - Cord Length - Power and Sensor Cords

C = 25' standard F = 50'

13th Character - Options

2 = Epoxy Coating

PUMP-TO-PANEL PART NUMBERS

Order Number	HP	Volts	S.F. Amps	Simplex 3 Phase Panel Part Number	Duplex 3 Phase Panel Part Number
4DWC4K3A2M1C	7.5	230	23.4	NSS32432	NSD32432
4DWC4K4A2M1C		460	11.7	NSS39014	NSD39014
4DWC4K5A2M1C		575	9.4	NSS390145	NSD390145
4DWC4L2A2K1C	10	200	35.6	NSS33040	NSD33040
4DWC4L3A2K1C		230	31	NSS33040	NSD33040
4DWC4L4A2K1C		460	15.5	NSS31318	NSD31318
4DWC4L5A2K1C		575	12.3	NSS390145	NSD390145
4DWC4M2A2G1C	15	200	54.8	NSS34865	NSD34865
4DWC4M3A2G1C		230	47.8	NSS34865	NSD34865
4DWC4M4A2G1C		460	23.9	NSS32432	NSD32432
4DWC4M5A2G1C		575	19.1	NSS317235	NSD317235
4DWC4N2A2E1C	20	200	74.8	NSS365115	NSD365115
4DWC4N3A2E1C		230	65	NSS365115	NSD365115
4DWC4N4A2E1C		460	32.5	NSS33040	NSD33040
4DWC4N5A2E1C		575	26.0	NSS324325	NSD324325
4DWC4P2A2C1C	25	200	83.6	NSS365115	NSD365115
4DWC4P3A2C1C		230	72.8	NSS365115	NSD365115
4DWC4P4A2C1C		460	36.4	NSS33040	NSD33040
4DWC4P5A2C1C		575	29.1	NSS324325	NSD324325
4DWC4Q2A2B1C	30	200	103.2	NSS365115	NSD365115
4DWC4Q3A2B1C		230	89.6	NSS365115	NSD365115
4DWC4Q4A2B1C		460	44.8	NSS33750	NSD33750
4DWC4Q5A2B1C		575	35.8	NSS330405	NSD330405
4DWC4R2A2A1C	40	200	132.8	Consult factory for custom quote.	Consult factory for custom quote.
4DWC4R3A2A1C		230	115.4	Consult factory for custom quote.	Consult factory for custom quote.
4DWC4R4A2A1C		460	57.7	NSS34865	NSD34865
4DWC4R5A2A1C		575	46.2	NSS337505	NSD337505
4DWC4K2A3D1C	7.5	200	30.4	NSS33040	NSD33040
4DWC4K3A3D1C		230	26.4	NSS32432	NSD32432
4DWC4K4A3D1C		460	13.2	NSS31318	NSD31318
4DWC4K5A3D1C		575	10.6	NSS390145	NSD390145
4DWC4L2A3A1C	10	200	40	NSS3750	NSD33750
4DWC4L3A3A1C		230	34.8	NSS33040	NSD33040
4DWC4L4A3A1C		460	17.4	NSS31723	NSD31723
4DWC4L5A3A1C		575	13.9	NSS313185	NSD313185

APPLICATION DATA

Maximum Solid Size	3"
Minimum Casing Thickness	5/16"
Casing Corrosion Allowance	1/8"
Maximum Working Pressure	100 PSI
Maximum Submergence	200 feet
Maximum Environmental Temperature	40°C (104°F) ambient conditions
Maximum Starts Per Hour	Maximum of 10 evenly spaced starts per hour

CONSTRUCTION DETAILS

Power Cable - Type	1/0 / 4, 2/4, 4/4, 6/4, 8/4, 10/4, 12/4 SOW or SOOW (see Model Info)
Control / Sensor Cable / Type	Type 18/5 SOW
Power Cable and Cap Assembly	Leads have a BUNA-N grommet in addition to being epoxy encapsulated
Power and Control Cable Lengths	25' standard, 50' optional
Motor Enclosure	Cast iron ASTM A-48 Class 30
Motor Shaft	Series 416 Stainless steel
Motor Design	NEMA design "B" with copper windings and designed to withstand 200 psi water pressure at all seal locations. Air-filled NEMA 210TY frame on 7.5, 10, 15 and 20 HP models. Air-filled NEMA 250TYS frame on 25 - 40 HP models.
Motor Insulation Rating	Class "F" insulation
Motor Thermal Protection	Two (2) normally closed on-winding thermostats open at 320° F (160° C), automatic reset closes at 221° F (105° C).
Motor Overload Protection	Class 10, ambient compensated, quick-trip overload protection must be provided in control panel.
Motor Moisture Protection	Two (2) moisture sensing probes in the oil-filled seal chamber must be connected to a relay in control panel.
Casing	Cast iron ASTM A-48 Class 30
Impeller	Cast iron ASTM A-48 Class 30
Impeller Type	Two vane enclosed design for maximum efficiency.
Casing/Impeller/Wear Ring	Replaceable bronze wear ring
External Hardware	Stainless steel


STANDARD PARTS

Ball Bearing	Lubricated for life bearings are designed for a minimum L10 life of 30,000 hours.	
210 and 250 Frame		Single row Radial (upper)
		Single row Thrust (lower)
Mechanical Seals - Standard	Upper	Carbon/rotary and ceramic/stationary
	Lower	
Mechanical Seals - Optional	Lower	Silicon carbide/rotary and tungsten carbide/stationary
	Lower	Silicon carbide/rotary and silicon carbide/stationary
Standard Motor O-rings	BUNA-N (nitrile)	
Seal Chamber Oil	Premium moisture resistant polyurea thickened grease containing rust inhibitors is suitable for operation over a temperature range of - 25° C to +120° C.	

DIMENSIONS

(All dimensions are in inches. Do not use for construction purposes.)

HP	RPM	"A" Dimensions (in.)
7½	1750	41.3
10		
15		
20		
25		
30	1150	46.6
40		
7½		
10		41.3

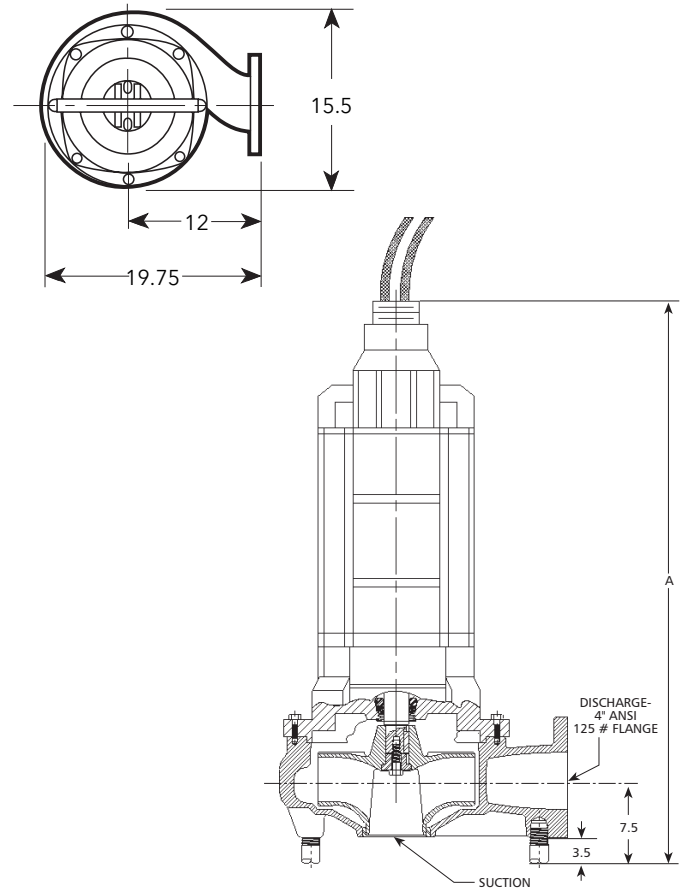


4DWC SERIES CONTROL PANELS

FEATURES

- Indoor/outdoor NEMA 4X panel enclosure: heavy duty polycarbonate with stainless steel lockable latches
- Duplex provides: two-pump alternation and high demand two-pump operation
- Visible pump control indicators: pump #1 and #2 hand-off-auto (H.O.A.) switch, green pump run lights, red Pump Fault lights with reset button, and Power On light
- Visible alarm indicators: High red beacon alarm light, alarm test and silence buttons
- Alarm horn sounds at 85 decibels at 10 feet
- Remote monitoring by dry contacts: high liquid, pump run(s), and pump fault(s)
- Upgraded pump protection: motor protective switches included for both pumps (branch circuit protection, adjustable overload and disconnect) and thermal cutout with indicators
- Four floats with 50' cords for duplex panels: off, lead, lag, high Level
- Three floats with 50' cords for simplex panels: on, off, high level
- Cycle counter with LCD display and reset for each pump
- Elapsed time meter with LCD display and reset for each pump
- Seal failure circuit with indicator light

APPLICATIONS

- Sewage pump chambers
- Grinder pumps
- Sump pump basins
- Lift stations

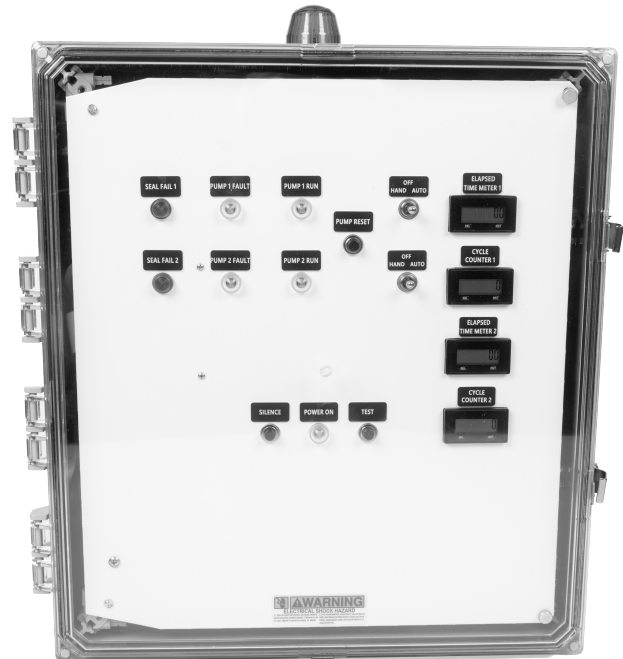

NOTES

Xylem |'zīləm|

- 1) The tissue in plants that brings water upward from the roots;
- 2) a leading global water technology company.

We're a global team unified in a common purpose: creating advanced technology solutions to the world's water challenges. Developing new technologies that will improve the way water is used, conserved, and re-used in the future is central to our work. Our products and services move, treat, analyze, monitor and return water to the environment, in public utility, industrial, residential and commercial building services settings. Xylem also provides a leading portfolio of smart metering, network technologies and advanced analytics solutions for water, electric and gas utilities. In more than 150 countries, we have strong, long-standing relationships with customers who know us for our powerful combination of leading product brands and applications expertise with a strong focus on developing comprehensive, sustainable solutions.

For more information on how Xylem can help you, go to www.xylem.com



Xylem, Inc.
2881 East Bayard Street Ext., Suite A
Seneca Falls, NY 13148
Phone: (866) 325-4210
Fax: (888) 322-5877
www.xylem.com/bellgossett

Xylem and Bell & Gossett are registered trademarks of Xylem Inc. or one of its subsidiaries. All other trademarks or registered trademarks are property of their respective owners.
© 2024 Xylem Inc. B4DWC R7 October 2024