

NS Simplex NSS33040


Control Panel Schematic and Layout

DRAWING
GWTNSS33040 R1

CONTROL PANEL SCHEMATIC


FILENAME: NSS33040

REVDATE: 0423

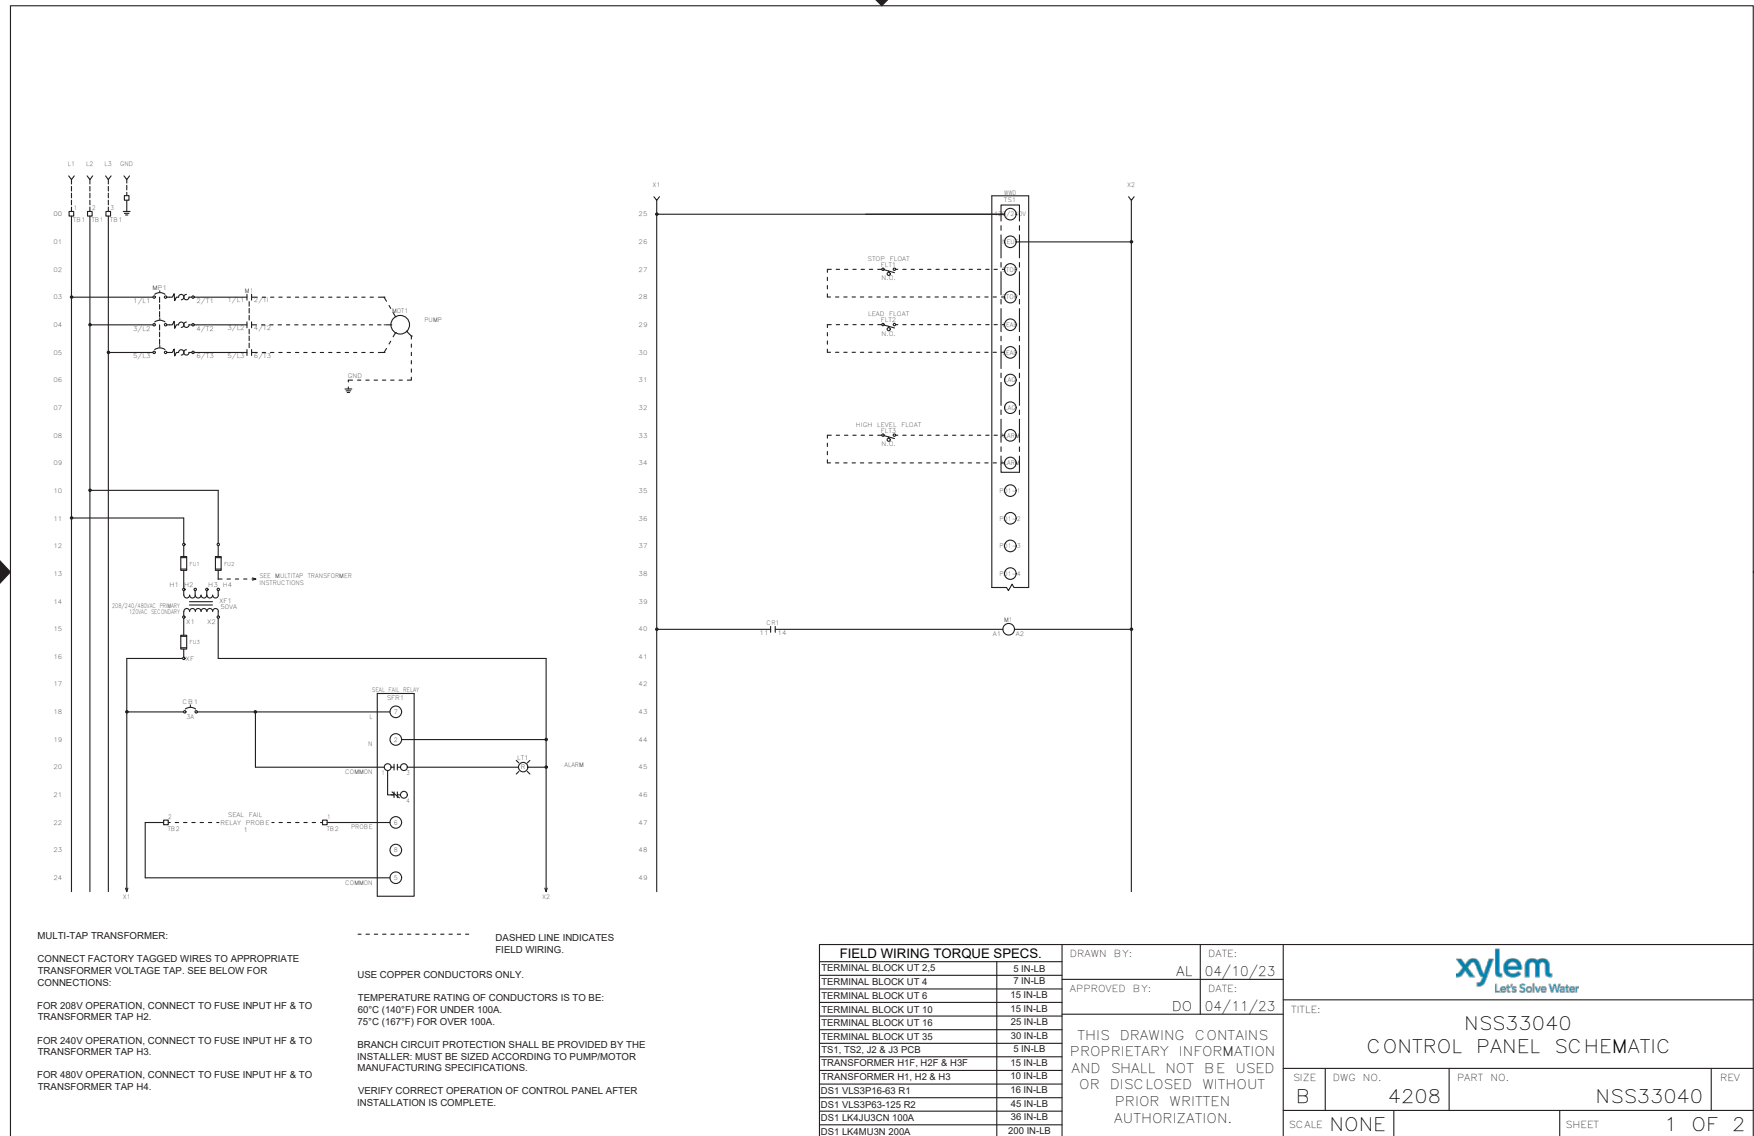

FNAME: NSS33040

REVDATE: 0423

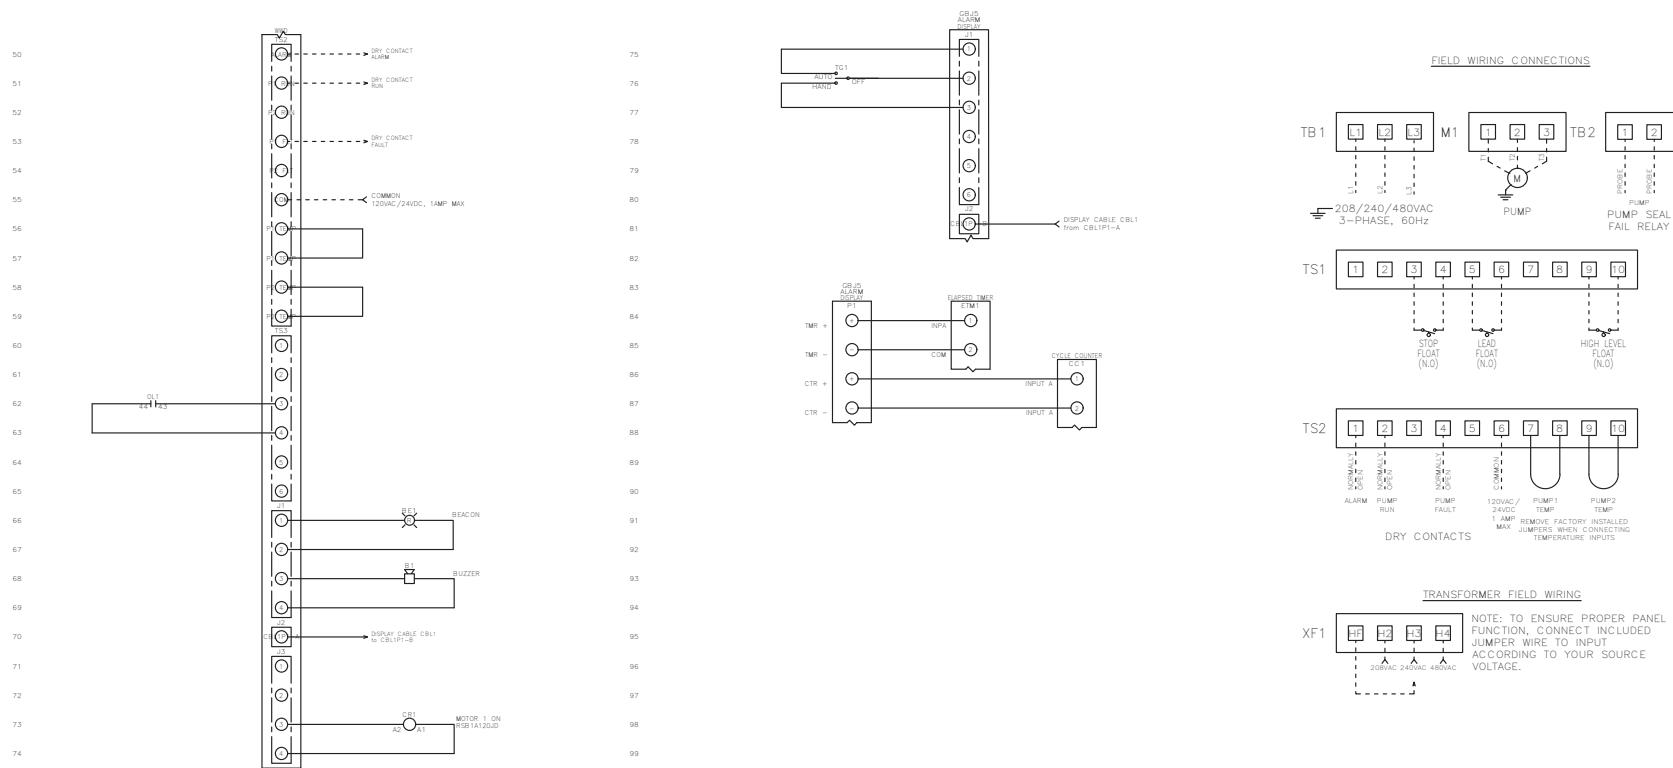

MULTI-TAP TRANSFORMER:
CONNECT FACTORY TAGGED WIRES TO APPROPRIATE TRANSFORMER VOLTAGE TAP. SEE BELOW FOR CONNECTIONS:
FOR 208V OPERATION, CONNECT TO FUSE INPUT HF & TO TRANSFORMER TAP H2.
FOR 240V OPERATION, CONNECT TO FUSE INPUT HF & TO TRANSFORMER TAP H3.
FOR 480V OPERATION, CONNECT TO FUSE INPUT HF & TO TRANSFORMER TAP H4.

----- DASHED LINE INDICATES FIELD WIRING.
USE COPPER CONDUCTORS ONLY.
TEMPERATURE RATING OF CONDUCTORS IS TO BE: 60°C (140°F) FOR UNDER 100A, 75°C (167°F) FOR OVER 100A.
BRANCH CIRCUIT PROTECTION SHALL BE PROVIDED BY THE INSTALLER; MUST BE SIZED ACCORDING TO PUMP/MOTOR MANUFACTURING SPECIFICATIONS.
VERIFY CORRECT OPERATION OF CONTROL PANEL AFTER INSTALLATION IS COMPLETE.


FIELD WIRING TORQUE SPECS.		DRAWN BY:	DATE:					
TERMINAL BLOCK UT 2.5	5 IN-LB	AL	04/10/23					
TERMINAL BLOCK UT 4	7 IN-LB	APPROVED BY: DO	DATE: 04/11/23	TITLE: NSS33040 CONTROL PANEL SCHEMATIC				
TERMINAL BLOCK UT 6	15 IN-LB							
TERMINAL BLOCK UT 10	15 IN-LB							
TERMINAL BLOCK UT 16	25 IN-LB							
TERMINAL BLOCK UT 35	30 IN-LB							
TS1, TS2, J2 & J3 PCB	5 IN-LB	THIS DRAWING CONTAINS PROPRIETARY INFORMATION AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN AUTHORIZATION.			SIZE	DWG NO.	PART NO.	REV
TRANSFORMER H1F, H2F & H3F	15 IN-LB				B	4208	NSS33040	
TRANSFORMER H1, H2 & H3	10 IN-LB							
DS1 VLS3P63-63 R1	16 IN-LB				SCALE NONE			
DS1 VLS3P63-125 R2	45 IN-LB				SHEET 2 OF 2			
DS1 LK4JU3CN 100A	36 IN-LB							
DS1 LK4MU3N 200A	200 IN-LB							

CONTROL PANEL LAYOUT

GWTNSS33040 R1

FNAME: NSS33040

REVDATE: 0423

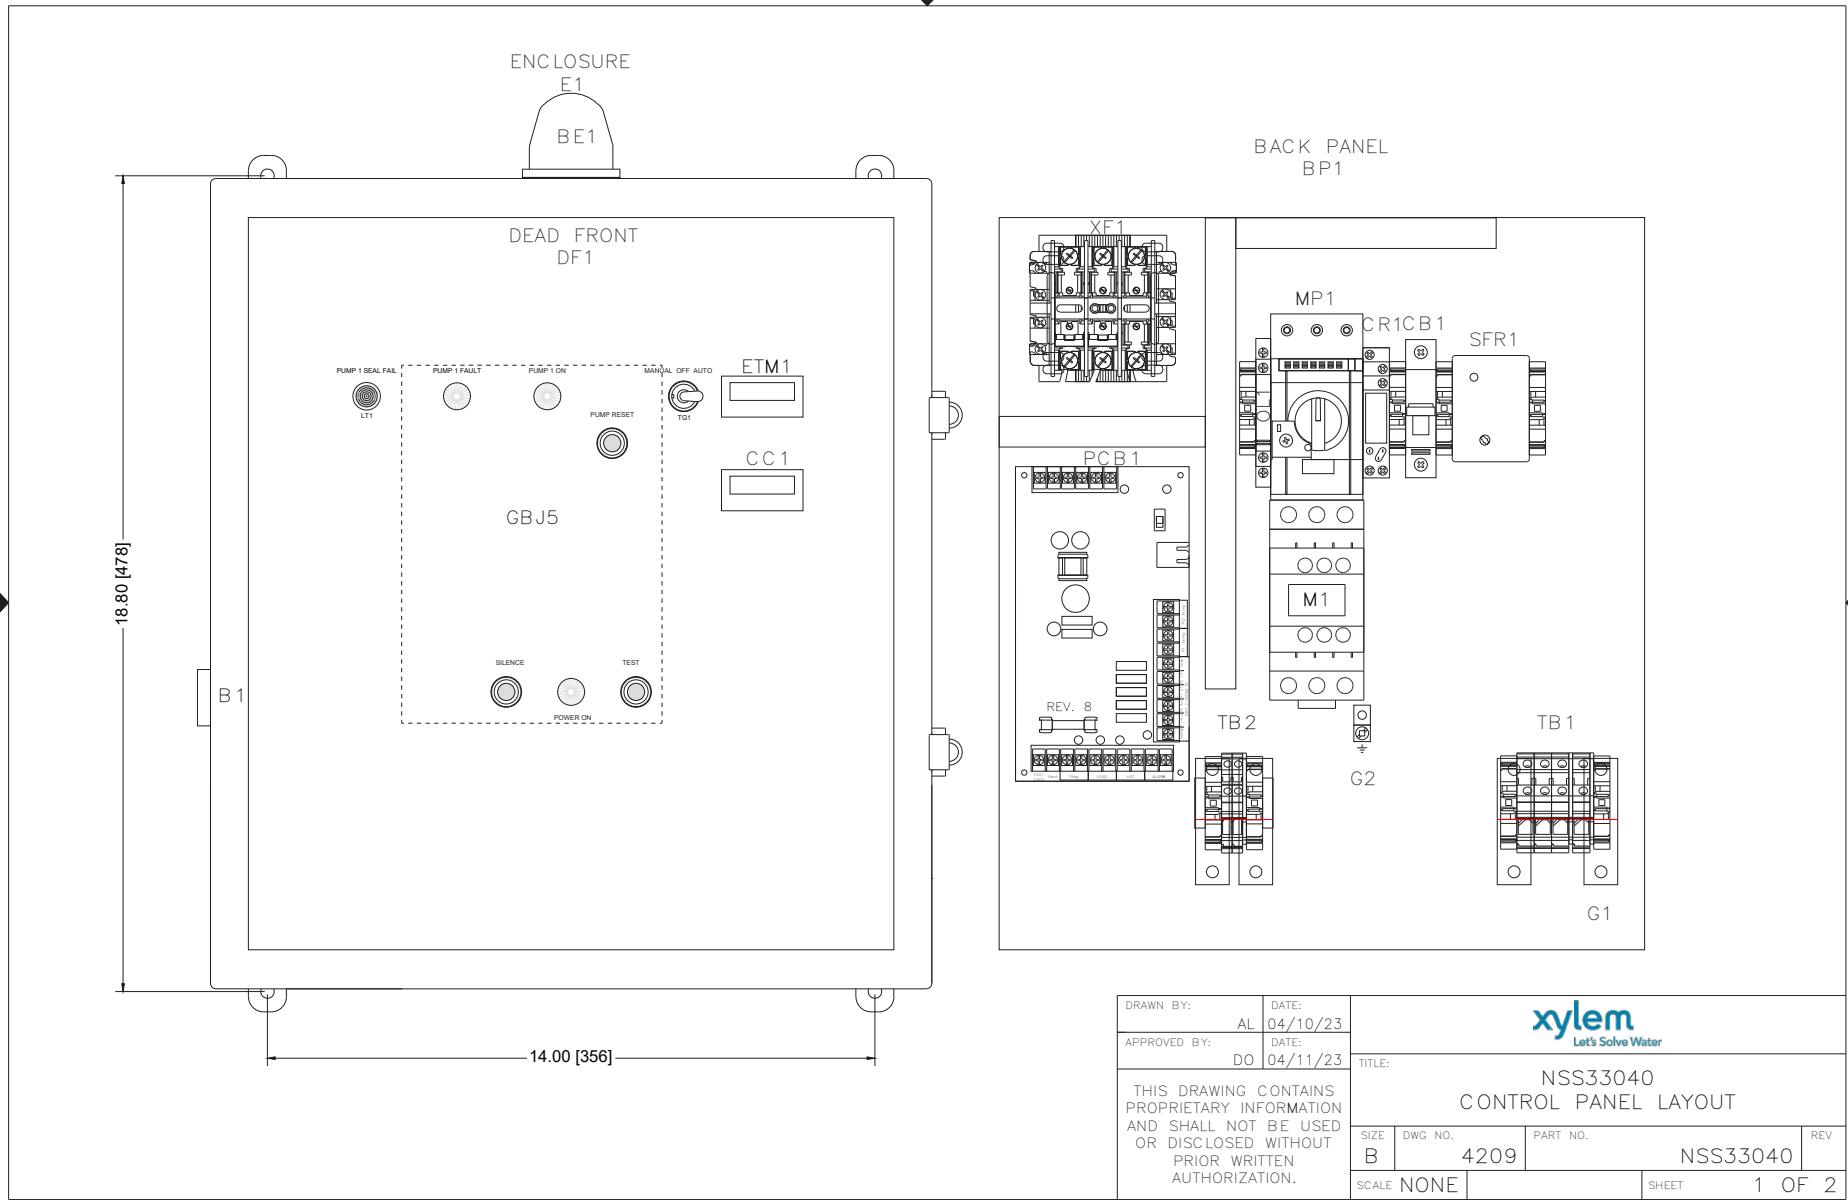

DRAWN BY:	AL	DATE:	04/10/23			
APPROVED BY:	DO	DATE:	04/11/23			
THIS DRAWING CONTAINS PROPRIETARY INFORMATION AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN AUTHORIZATION.				TITLE:		
				NSS33040 CONTROL PANEL LAYOUT		
				SIZE	DWG NO.	PART NO.
				B	4209	NSS33040
				SCALE	NONE	SHEET 1 OF 2

CONTROL PANEL LAYOUT

FNAME: NSS33040

REVDATE: 0423

QTY	MANUFACTURER	DESCRIPTION	PART NUMBER	REF.
1	Integra	P.C. Nema 4X Enclosure 18x16x10	H181610HCLL	E1
1	All-Spec	Dead Front	624P	DF1
1	All-Spec	Back Panel	625	BP1
1	Integra	Hinge Kit	US0PK-P909	N/A
1	Ingram	Beacon	R10-SM	BE1
1	Ingram	Buzzer	PB-024-AD	B1
1	VCC	Red Light 125V	1050QC1	LT1
1	See Water	Display Board	GBJ5	GBJ5
3	LEDTRONICS	White Lense	LENS-LCD780-CW F	N/A
2	See Water	Flat Cable Assembly	IDC-25MB	N/A
2	Molex	4 Pin Connector	09-50-3041	N/A
1	Molex	6 Pin Connector	09-50-3061	N/A
1	See Water	Power Circuit Board	WWD	PCB1
1	Carling	HOA Toggle Switch	6FC57-73	TG1
1	Schneider	Multitap Transformer 50VA	9070TF50D20	XF1
2	Mersen	ATQR 3/10A Fuse	ATQR-3/10A	XF1
1	Mersen	TRM 6/10A Fuse	TRM-6/10A	XF1
1	Schneider	Motor Protector	GV3P40	MP1

QTY	MANUFACTURER	DESCRIPTION	PART NUMBER	REF.
1	Schneider	Side Mount Auxiliary	GVAN11	OL1
1	Schneider	Contactor	LC1D40AG7	M1
1	Noark	Circuit Breaker 3A 1 Pole	B1E1C3	CB1
1	Schneider	Mini Plug In Relay Holder	RSZE1S35M	CR1
1	Schneider	Mini Plug In Relay Clamp	RSZR215	CR1
1	Schneider	Mini Plug In Relay 12VDC	RSB1A120JD	CR1
1	Macromatics	Seal Fail Dual Channel Relay	SFP120C100	SFR1
1	Macromatics	8 Pin Socket	70169-D	SFR1
1	Trumeter	Elapsed Time Meter	6320-2500-0000	ETM1
1	Trumeter	Cycle Counter	6300-2500-0000	CC1
2	Phoenix Contact	Terminal Block UT-4	3044102	TB2
3	Phoenix Contact	Terminal Block UT-10	3044160	TB1
1	Phoenix Contact	Terminal Block UT-10-PE	3044173	G1-2
7	Phoenix Contact	End Stop	3022218	N/A
3	Phoenix Contact	End Cover	3047028	N/A
1	Burndy	Ground	6T	G2
4	Altech	Angled Mounting Bracket	CA603	N/A
3	See Water	N.O. Narrow Angle Floats 50'	FPC0N50	N/A
1	UL	508A UL Label	N/A	N/A

DRAWN BY:	AL	DATE:	04/10/23		
APPROVED BY:	DO	DATE:	04/11/23		
THIS DRAWING CONTAINS PROPRIETARY INFORMATION AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN AUTHORIZATION.				TITLE:	
				NSS33040	
				CONTROL PANEL LAYOUT	
SIZE	B	DWG NO.	4209	PART NO.	NSS33040
SCALE		NONE		SHEET	2 OF 2



Xylem Inc.
2881 East Bayard Street Ext.
Seneca Falls, NY 13148
Phone: (800) 453-6777
Fax: (888) 322-5877
www.xylem.com/goulds

Xylem is a registered trademark of Xylem Inc. or one of its subsidiaries. Goulds is a registered trademark of ITT Manufacturing Enterprises LLC and is used under license. All other trademarks or registered trademarks are property of their respective owners.
© 2023 Xylem Inc. GWTNSS33040 R1 July 2023