


JOB:	REPRESENTATIVE:	
UNIT TAG:	ORDER NO.	DATE:
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:



Model VSC

8x10x10¹/₂A

Double Suction Split Case Pump



SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

STANDARD MATERIALS OF CONSTRUCTION


- Cast Iron Bronze Fitted
- Heavy Duty Maintenance Free Bearings
- Alignment Friendly Coupling
- Heavy Duty Groutless Baseplate
- ANSI/OSHA Coupling Guard
- ISO 1940-1:2003 Impeller Balance

OPTIONAL MATERIALS OF CONSTRUCTION


- Galvanized Drip Pan
- Spacer Coupling

TYPE OF SEAL AND WORKING PRESSURE

- Standard:** 175 PSIG (12 BAR) max. working pressure, flat face flanges, 125# ANSI flange drilling, Unitized mechanical seal, EPR/Carbon /Silicon Carbide, 175 PSIG (12 BAR) max. suction pressure, 0 to 300°F (-18 to 149°C)
- Optional:** 300 PSIG (20 BAR) max. working pressure, flat face flanges, 250# ANSI flange drilling, Unitized mechanical seal, EPR/Carbon /Silicon Carbide, 200 PSIG (13.7 BAR) max. suction pressure, 0 to 300°F (-18 to 149°C)
- Optional:** 300 PSIG (20 BAR) max. working pressure, flat face flanges, 250# ANSI flange drilling, balanced mechanical seal, EPR/Graphite loaded Silicon Carbide on Graphite loaded Silicon Carbide, 300 PSIG (20 BAR) max. suction pressure, 0 to 300°F (-18 to 149°C)

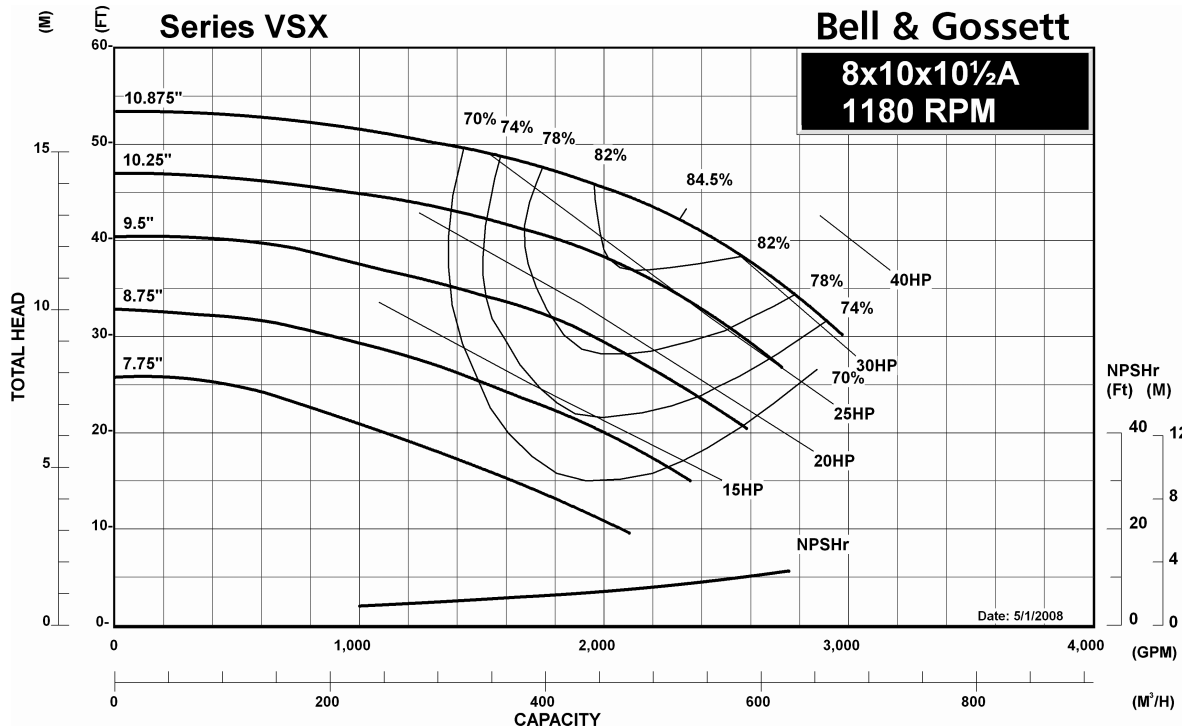

JOB:	REPRESENTATIVE:	
UNIT TAG:	ORDER NO.	DATE:
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:



Model VSC

8x10x10¹/₂A

Double Suction Split Case Pump



SPECIFICATIONS

FLOW _____ HEAD _____

HP _____ RPM _____

VOLTS _____

CYCLE _____ PHASE _____

ENCLOSURE _____

APPROX. WEIGHT _____

SPECIALS _____

STANDARD MATERIALS OF CONSTRUCTION


- Cast Iron Bronze Fitted
- Heavy Duty Maintenance Free Bearings
- Alignment Friendly Coupling
- Heavy Duty Groutless Baseplate
- ANSI/OSHA Coupling Guard
- ISO 1940-1:2003 Impeller Balance

OPTIONAL MATERIALS OF CONSTRUCTION


- Galvanized Drip Pan
- Spacer Coupling

TYPE OF SEAL AND WORKING PRESSURE

- Standard:** 175 PSIG (12 BAR) max. working pressure, flat face flanges, 125# ANSI flange drilling, Unitized mechanical seal, EPR/Carbon /Silicon Carbide, 175 PSIG (12 BAR) max. suction pressure, 0 to 300°F (-18 to 149°C)
- Optional:** 300 PSIG (20 BAR) max. working pressure, flat face flanges, 250# ANSI flange drilling, Unitized mechanical seal, EPR/Carbon /Silicon Carbide, 200 PSIG (13.7 BAR) max. suction pressure, 0 to 300°F (-18 to 149°C)
- Optional:** 300 PSIG (20 BAR) max. working pressure, flat face flanges, 250# ANSI flange drilling, balanced mechanical seal, EPR/Graphite loaded Silicon Carbide on Graphite loaded Silicon Carbide, 300 PSIG (20 BAR) max. suction pressure, 0 to 300°F (-18 to 149°C)

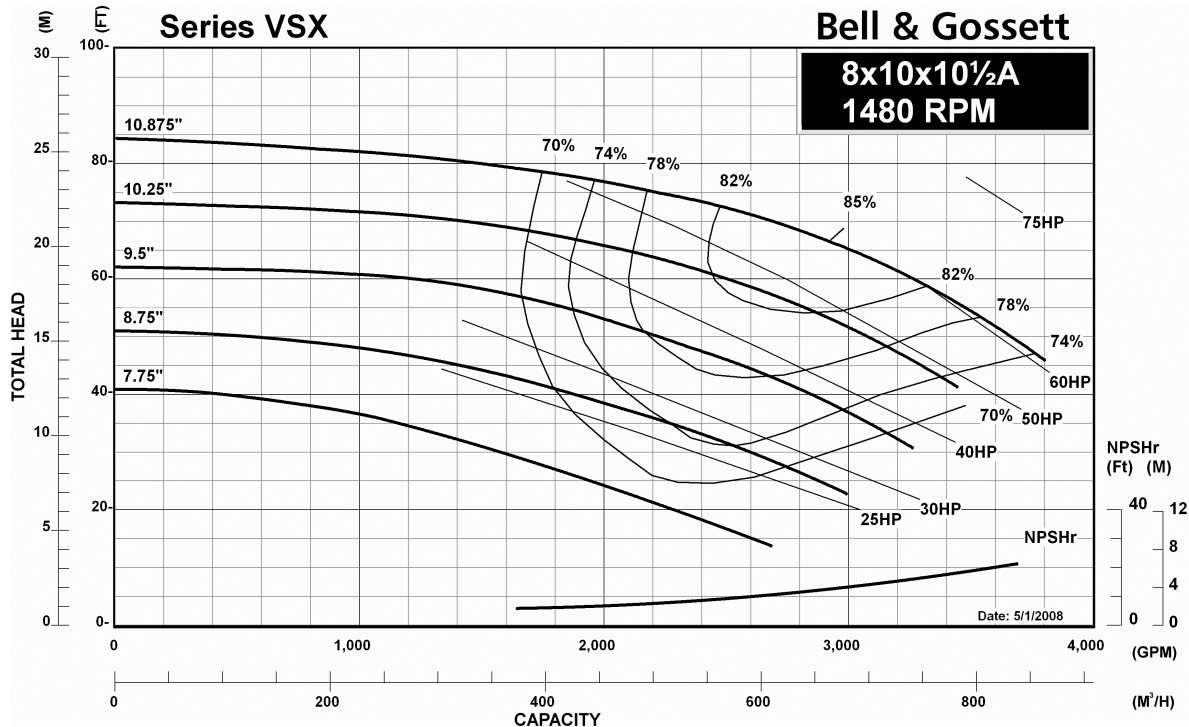

JOB:	REPRESENTATIVE:	
UNIT TAG:	ORDER NO.:	DATE:
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:



Model VSC 8x10x10¹/₂A Double Suction Split Case Pump



SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

STANDARD MATERIALS OF CONSTRUCTION


- Cast Iron Bronze Fitted
- Heavy Duty Maintenance Free Bearings
- Alignment Friendly Coupling
- Heavy Duty Groutless Baseplate
- ANSI/OSHA Coupling Guard
- ISO 1940-1:2003 Impeller Balance

OPTIONAL MATERIALS OF CONSTRUCTION

- Galvanized Drip Pan
- Spacer Coupling



TYPE OF SEAL AND WORKING PRESSURE

- Standard:** 175 PSIG (12 BAR) max. working pressure, flat face flanges, 125# ANSI flange drilling, Unitized mechanical seal, EPR/Carbon/Silicon Carbide, 175 PSIG (12 BAR) max. suction pressure, 0 to 300°F (-18 to 149°C)
- Optional:** 300 PSIG (20 BAR) max. working pressure, flat face flanges, 250# ANSI flange drilling, Unitized mechanical seal, EPR/Carbon/Silicon Carbide, 200 PSIG (13.7 BAR) max. suction pressure, 0 to 300°F (-18 to 149°C)
- Optional:** 300 PSIG (20 BAR) max. working pressure, flat face flanges, 250# ANSI flange drilling, balanced mechanical seal, EPR/Graphite loaded Silicon Carbide on Graphite loaded Silicon Carbide, 300 PSIG (20 BAR) max. suction pressure, 0 to 300°F (-18 to 149°C)

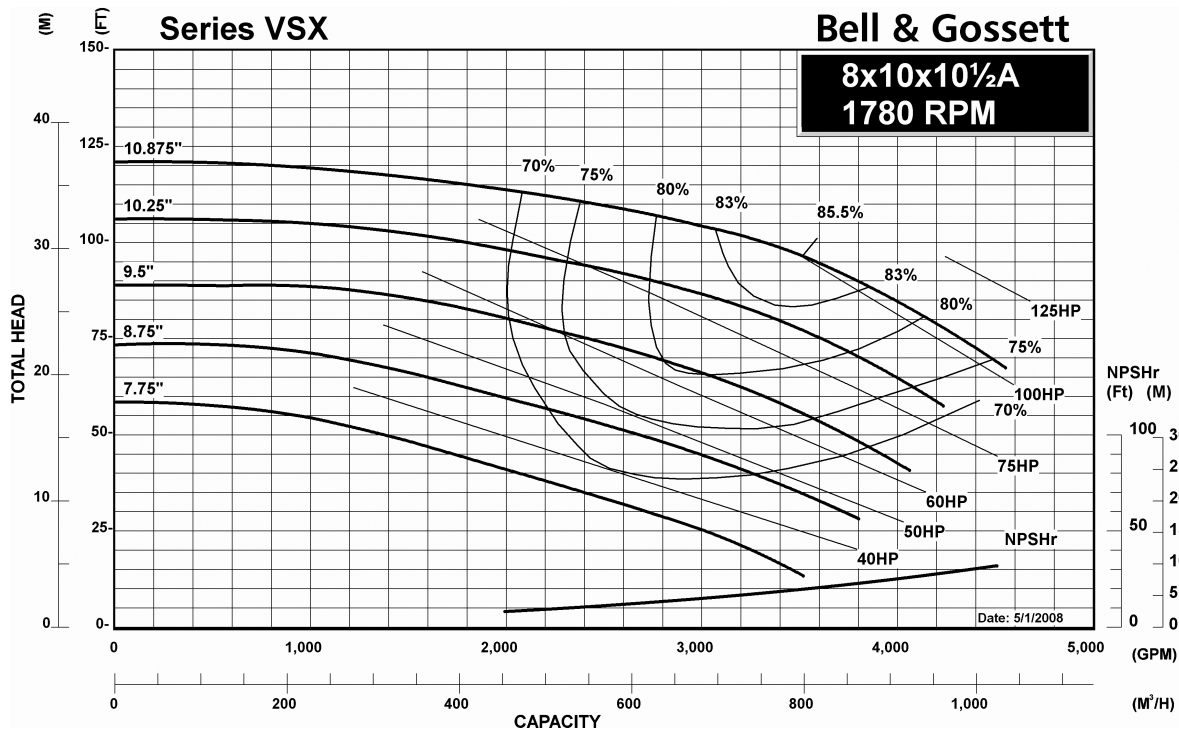

Model VSC 8x10x10½A Centrifugal Pump Submittal

B-870.1A

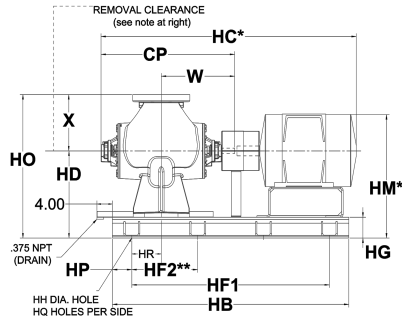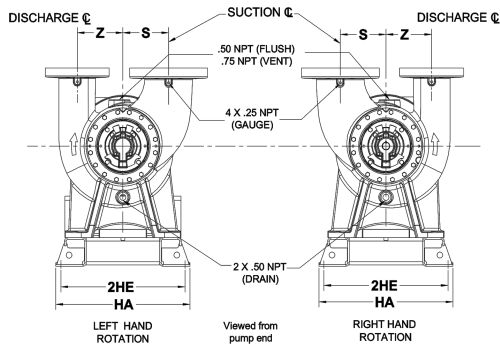

FLANGE DIMENSIONS IN INCHES (MM)			
	SIZE	THICKNESS	O.D.
Discharge	8"	1.88 (48)	14.75 (375)
Suction	10"	2.13 (54)	17.00 (432)

FLANGES ARE 125# ANSI - STANDARD
250# ANSI - AVAILABLE

DIMENSIONS IN INCHES (MM)		
S	X	Z
8.97 (228)	15.5 (394)	8.97 (228)

Removal clearance from end of bracket: 24 Inches (610 mm)

STANDARD COUPLER

- * Motor dimensions are approximate and vary by manufacturer and motor type.
- ** Dimensions vary due to coupler gap based on horse power.
- *** Distance to the next available hole.



MOTOR FRAME	DIMENSIONS - INCHES (mm) FOR STANDARD COUPLER															
	CP	HA	HB	HC*	HD	2HE	HF1	HF2***	HG	HH	HM*	HO	HP	HQ	HR	W
254T	34.48 (876)	23.9 (607)	61 (1549)	58.495 (1486)	23.25 (591)	19.9 (505)	51 (1295)	25.5 (648)	5.25 (133)	1.125 (29)	31.07 (789)	38.75 (984)	5 (127)	3	7.625 (194)	18.93 (481)
256T	34.48 (876)	23.9 (607)	61 (1549)	60.245 (1530)	23.25 (591)	19.9 (505)	51 (1295)	25.5 (648)	5.25 (133)	1.125 (29)	31.07 (789)	38.75 (984)	5 (127)	3	7.625 (194)	18.93 (481)
284T/TS	34.48 (876)	23.9 (607)	61 (1549)	61.408 (1560)	23.25 (591)	19.9 (505)	51 (1295)	25.5 (648)	5.25 (133)	1.125 (29)	31.07 (789)	38.75 (984)	5 (127)	3	7.625 (194)	18.93 (481)
286T/TS	34.48 (876)	23.9 (607)	61 (1549)	62.904 (1598)	23.25 (591)	19.9 (505)	51 (1295)	25.5 (648)	5.25 (133)	1.125 (29)	31.07 (789)	38.75 (984)	5 (127)	3	7.625 (194)	18.93 (481)
324T/TS	34.48 (876)	23.9 (607)	61 (1549)	65.725 (1669)	23.25 (591)	19.9 (505)	51 (1295)	25.5 (648)	5.25 (133)	1.125 (29)	31.82 (789)	38.75 (984)	5 (127)	3	7.625 (194)	18.93 (481)
326T/TS	34.48 (876)	23.9 (607)	61 (1549)	66.845 (1698)	23.25 (591)	19.9 (505)	51 (1295)	25.5 (648)	5.25 (133)	1.125 (29)	32.35 (822)	38.75 (984)	5 (127)	3	7.625 (194)	18.93 (481)
364T/TS	34.48 (876)	23.9 (607)	61 (1549)	68.684 (1745)	23.25 (591)	19.9 (505)	51 (1295)	25.5 (648)	5.25 (133)	1.125 (29)	33.2 (843)	38.75 (984)	5 (127)	3	7.625 (194)	18.93 (481)
365T/TS	34.48 (876)	23.9 (607)	61 (1549)	68.684 (1745)	23.25 (591)	19.9 (505)	51 (1295)	25.5 (648)	5.25 (133)	1.125 (29)	33.2 (843)	38.75 (984)	5 (127)	3	7.625 (194)	18.93 (481)
404T/TS	34.48 (876)	23.9 (607)	70 (1778)	71.785** (1823)	23.25 (591)	19.9 (505)	60 (1524)	20 (508)	5.25 (133)	1.125 (29)	33.72 (856)	38.75 (984)	5 (127)	4	7.625 (194)	18.93 (481)
405T/TS	34.48 (876)	23.9 (607)	70 (1778)	73.785** (1874)	23.25 (591)	19.9 (505)	60 (1524)	20 (508)	5.25 (133)	1.125 (29)	33.72 (856)	38.75 (984)	5 (127)	4	7.625 (194)	18.93 (481)
444T/TS	34.48 (876)	23.9 (607)	70 (1778)	79.251 (2013)	23.25 (591)	19.9 (505)	60 (1524)	20 (508)	5.25 (133)	1.125 (29)	38.77 (985)	38.75 (984)	5 (127)	4	7.625 (194)	18.93 (481)
445T/TS	34.48 (876)	23.9 (607)	70 (1778)	80.855 (2054)	23.25 (591)	19.9 (505)	60 (1524)	20 (508)	5.25 (133)	1.125 (29)	38.77 (985)	38.75 (984)	5 (127)	4	7.625 (194)	18.93 (481)

Dimensions are subject to change. Not to be used for construction purposes unless certified.

Units may be built where foot/feet overhang the motor mounting platform. If overhang is unacceptable, consult factory for a custom submittal, quotation and/or lead time. A certified motor drawing will be required.

Model VSC 8x10x10½A Centrifugal Pump Submittal

B-870.1A

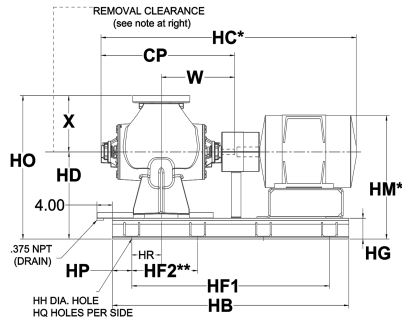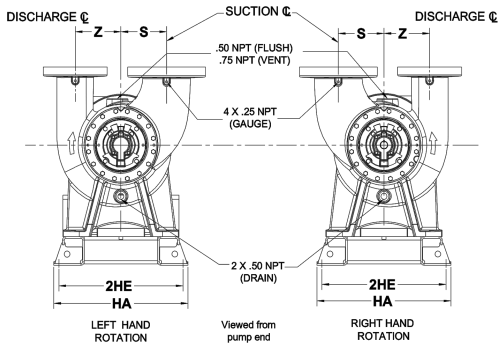

FLANGE DIMENSIONS IN INCHES (MM)			
	SIZE	THICKNESS	O.D.
Discharge	8"	1.88 (48)	14.75 (375)
Suction	10"	2.13 (54)	17.00 (432)

FLANGES ARE 125# ANSI - STANDARD
250# ANSI - AVAILABLE

DIMENSIONS IN INCHES (MM)		
S	X	Z
8.97 (228)	15.5 (394)	8.97 (228)

Removal clearance from end of bracket: 24 Inches (610 mm)

SPACER COUPLER

- * Motor dimensions are approximate and vary by manufacturer and motor type.
- ** Dimensions vary due to coupler gap based on horse power.
- *** Distance to the next available hole.

MOTOR FRAME	DIMENSIONS - INCHES (mm) FOR SPACER COUPLER ****															
	CP	HA	HB	HC*	HD	2HE	HF1	HF2***	HG	HH	HM*	HO	HP	HQ	HR	W
254T	34.48 (876)	23.9 (607)	70 (1778)	69.745 (1772)	23.25 (591)	19.9 (505)	60 (1524)	20 (508)	5.25 (133)	1.125 (29)	31.07 (789)	38.75 (984)	5 (127)	4	7.625 (194)	18.93 (481)
256T	34.48 (876)	23.9 (607)	70 (1778)	71.495 (1816)	23.25 (591)	19.9 (505)	60 (1524)	20 (508)	5.25 (133)	1.125 (29)	31.07 (789)	38.75 (984)	5 (127)	4	7.625 (194)	18.93 (481)
284T/TS	34.48 (876)	23.9 (607)	70 (1778)	72.658 (1846)	23.25 (591)	19.9 (505)	60 (1524)	20 (508)	5.25 (133)	1.125 (29)	31.07 (789)	38.75 (984)	5 (127)	4	7.625 (194)	18.93 (481)
286T/TS	34.48 (876)	23.9 (607)	70 (1778)	74.154 (1884)	23.25 (591)	19.9 (505)	60 (1524)	20 (508)	5.25 (133)	1.125 (29)	31.07 (789)	38.75 (984)	5 (127)	4	7.625 (194)	18.93 (481)
324T/TS	34.48 (876)	23.9 (607)	80 (2032)	76.975 (1955)	23.25 (591)	19.9 (505)	70 (1778)	23.33 (593)	5.25 (133)	1.125 (29)	31.82 (789)	38.75 (984)	5 (127)	4	7.625 (194)	18.93 (481)
326T/TS	34.48 (876)	23.9 (607)	80 (2032)	78.095 (1984)	23.25 (591)	19.9 (505)	70 (1778)	23.33 (593)	5.25 (133)	1.125 (29)	32.35 (822)	38.75 (984)	5 (127)	4	7.625 (194)	18.93 (481)
364T/TS	34.48 (876)	23.9 (607)	80 (2032)	79.934 (2030)	23.25 (591)	19.9 (505)	70 (1778)	23.33 (593)	5.25 (133)	1.125 (29)	33.2 (843)	38.75 (984)	5 (127)	4	7.625 (194)	18.93 (481)
365T/TS	34.48 (876)	23.9 (607)	80 (2032)	79.934 (2030)	23.25 (591)	19.9 (505)	70 (1778)	23.33 (593)	5.25 (133)	1.125 (29)	33.2 (843)	38.75 (984)	5 (127)	4	7.625 (194)	18.93 (481)
404T/TS	34.48 (876)	23.9 (607)	80 (2032)	82.535 (2096)	23.25 (591)	19.9 (505)	70 (1778)	23.33 (593)	5.25 (133)	1.125 (29)	33.72 (856)	38.75 (984)	5 (127)	4	7.625 (194)	18.93 (481)
405T/TS	34.48 (876)	23.9 (607)	80 (2032)	84.535 (2147)	23.25 (591)	19.9 (505)	70 (1778)	23.33 (593)	5.25 (133)	1.125 (29)	33.72 (856)	38.75 (984)	5 (127)	4	7.625 (194)	18.93 (481)
444T/TS	34.48 (876)	23.9 (607)	80 (2032)	90.001 (2286)	23.25 (591)	19.9 (505)	70 (1778)	23.33 (593)	5.25 (133)	1.125 (29)	38.77 (985)	38.75 (984)	5 (127)	4	7.625 (194)	18.93 (481)
445T/TS	34.48 (876)	23.9 (607)	80 (2032)	91.605 (2327)	23.25 (591)	19.9 (505)	70 (1778)	23.33 (593)	5.25 (133)	1.125 (29)	38.77 (985)	38.75 (984)	5 (127)	4	7.625 (194)	18.93 (481)

Dimensions are subject to change. Not to be used for construction purposes unless certified.

Units may be built where foot/feet overhang the motor mounting platform. If overhang is unacceptable, consult factory for a custom submittal, quotation and/or lead time. A certified motor drawing will be required.

****These dimensions are valid when using the Woods Duraflex spacer coupling option. For dimensions on Falk SteelFlex coupling options, consult factory for a special submittal drawing.

Xylem Inc.
8200 N. Austin Avenue
Morton Grove, IL 60053
Phone: (847)966-3700 Fax: (847)965-8379
www.bellgossett.com
Bell & Gossett is a trademark of Xylem Inc. or one of its subsidiaries.
© 2016 Xylem Inc.

